



1.5 GALLON COFFEE BREWING SYSTEM

CBS-2150 TOUCHSCREEN SERIES

The 1.5 Gallon CBS-2151 / 2152 XTS Touchscreen Series Coffee Brewers provide flexibility in medium-to-large sized venues such as Banquet Halls, Cafeterias and Restaurants. Simplify your daily operations and experience total control of this fully featured Extractor® Brewing System via an inviting touchscreen interface display that is intuitive, easy to read and simple to navigate.



CBS-2151XTS
Single Station Brewer*



CBS-2152XTS
Dual Station Brewer*

* Shown with L4D-15 Luxus® Dispenser (sold separately)

FETCO®
TRUSTED | RELIABLE | QUALITY

Perfect taste begins with a simple touch...

User Friendly Touchscreen

Access all controls via an inviting touchscreen interface display that blends intuitive icons with dynamic time and volume data to provide instant visual feedback at any point during programming, diagnostics or the brew cycle.



Streamlined Programming, Diagnostics and Metrics

The Extractor® Touchscreen Operating System (ETOS) was engineered for quick and efficient navigation through set-up, programming, diagnostics and daily operational brewing modes.



Customizable Screens

Customize the start screen to tie your equipment and product offerings into a consistent brand message. You can also create and display individual recipe names for quick and easy access to your most used coffee blends.



XTS™ Series

Driven by a user friendly touchscreen interface and intuitive software, the XTS series represents the next step in the evolution of FETCO's renown EXTRACTOR brewing technology.




Cascading Spray Dome™

Hot tank water flows over clog-free channels built into the dome and virtually eliminates spray head scale buildup – a leading reason for service calls.



Legendary Extractor® Control

Although designed specifically for smaller batch airport dispensing, these high quality brewers possess the legendary features and reliable performance you've come to expect from Extractor® branded products.

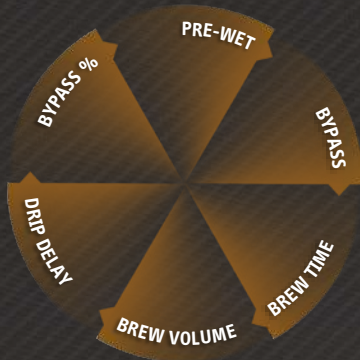

Efficient Design & Construction

FETCO equipment is designed and built to standards well above most others on the market today and can deliver significant energy savings when compared to similar competitor's products.



Modern Convenience

Duplicate profiles and parameters to and from any of the batch buttons on a single machine or copy the information to an unlimited number of brewers via a removable SD card (sold separately).



Contemporary Style

Sleek European cabinet design is attractive and fits well in most front-of-house decor typically found in coffee shops, lounges and cafes.



Water Specification

Water Connection Inlet 3/8" Male Flare Fitting	Minimum Flow Rate 1½ gpm [5.7 lpm]	Water Pressure 20-75 psig [138-517 kPa]
---	---------------------------------------	--

Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E215151	2 x 3.0 kW	200-240	1	2+G	4.2-6.1	Terminal Block	22.1-25.5	11.5 [43.5] ⁽¹⁾

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water. 1.5 gallon per batch.

Compatible Dispensers

#D009 1.5 Gallon LUXUS® Portable
TPD-15 Thermal Dispenser

Product Dimensions
(HxWxD):
24¹/₈" x 9⁵/₁₆" x 13⁷/₈"
[61.3 x 23.7 x 35.2 cm]
Weight (Empty / Filled)
12.8 lbs [5.8 kg] /
24.7 lbs [11.2 kg]



#D449 1.5 Gallon LUXUS®
L4D-15 Thermal Dispenser

Product Dimensions
(HxWxD):
23" x 9" x 13¹/₄"
[58.4 x 22.9 x 33.6 cm]
Weight (Empty / Filled)
10.5 lbs [4.8 kg] /
22.4 lbs [10.2 kg]



#D452 1.5 Gallon LUXUS®
L4S-15 Thermal Server*

Product Dimensions
(HxWxD):
14³/₄" x 9" x 12¹/₂"
[37.4 x 22.9 x 31.7 cm]
Weight (Empty / Filled)
7.2 lbs [3.3 kg] /
17.6 lbs [8.0 kg]



* Must be used with S4S Serving Stations.

Serving Stations

#A150
S4S-15/20-1
Single Serving Station
for L4S-15 & L4S-20



#A151
S4S-15/20-2
Twin Serving Station
for L4S-15 & L4S-20



#A152
S4S-15/20-3
Triple Serving Station
for L4S-15 & L4S-20



Paper Filter

#F001
15" x 5.5"
Standard Paper
Coffee Filter



Brew Basket

#B001280B1
16" x 6"
Stainless Steel
Brew Basket



#B015280BN2
16" x 6"
Plastic Brew Basket
w/ Brown Insert



Cups per Hour*

8oz. 248	12oz. 165
16oz. 124	20oz. 99


* Approximate based on maximum power setting.

Colored Brew Basket Handle Inserts

Blue: 1023.00180.00	Red: 1023.00190.00	Green: 1023.00191.00	Orange: 1023.00192.00
------------------------	-----------------------	-------------------------	--------------------------

Measurements

Height	Width	Depth	Empty Weight	Filled Weight	Combined Filled Weight	Hot Water Tank Cap.	Shipping Weight:	Shipping Dimensions:
36 ³ / ₄ " [93.3 cm]	12 ³ / ₄ " [32.4 cm]	22 ³ / ₄ " [57.7 cm]	53 lbs [24.0 kg]	106 lbs [48.0 kg]	129 lbs [59.0 kg] BREWER + 1 FILLED L40-15 DISPENSER	6.4 gal [24.0 l]	57 lbs [26.0 kg]	37" x 18" x 24" [94.0 x 45.7 x 61.0 cm]

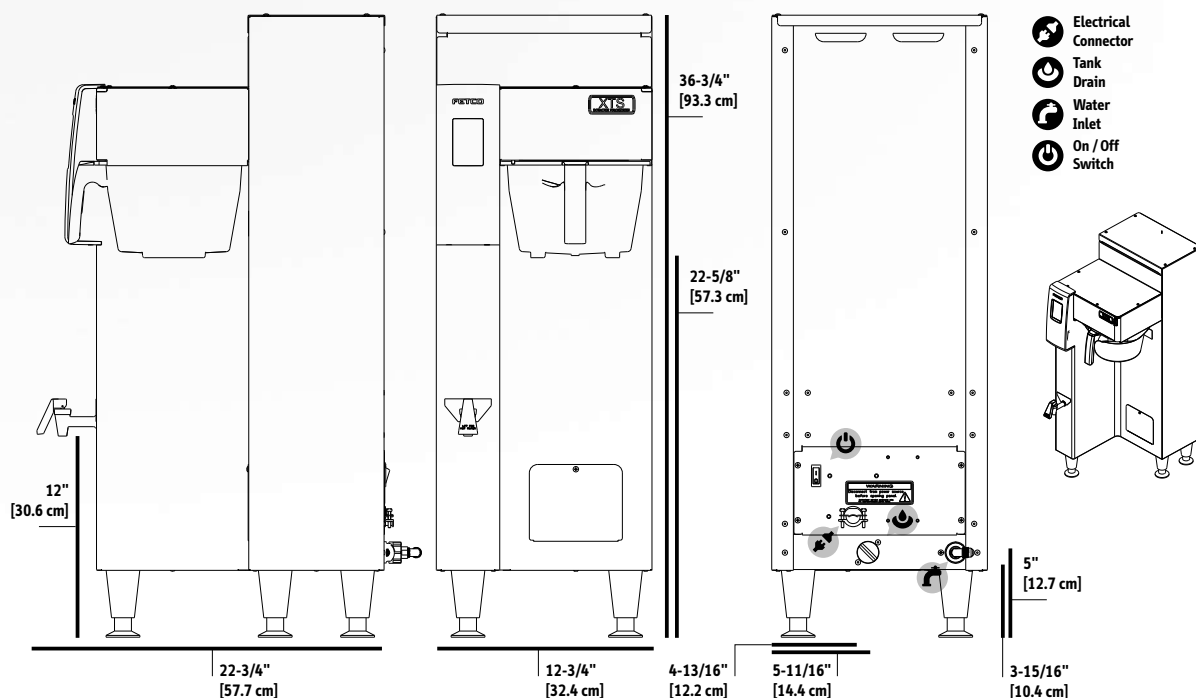

Gallery



Water Specification

Water Connection Inlet
3/8" Male Flare Fitting

Minimum Flow Rate
1 1/2 gpm [5.7 lpm]

Water Pressure
20-75 psig [138-517 kPa]

Electrical Configuration

Configuration Code	Heater Configuration	Voltage	Phase	Wires	KW	Electrical Connection	Max Amp Draw	Gallon [Liter] / Hour
E215251	2 x 3.0 kW	208-240	1 ⁽²⁾	2+G	4.6-6.1	Terminal Block	22.4-25.8	11.5-15.5 [43.7-58.9] ⁽¹⁾
	3 x 3.0 kW	208-240	3	3+G	6.9-9.1	Terminal Block	19.5-22.5	17.4-23.0 [65.9-87.0] ⁽¹⁾
E215252	2 x 5.0 kW	208-240	1 ⁽²⁾	2+G	7.6-10.1	Terminal Block	36.9-42.5	19.3-25.7 [73.1-97.3] ⁽¹⁾
	3 x 5.0 kW	208-240	3	3+G	11.4-15.1	Terminal Block	32.0-36.9	29.0-38.4 [109.4-145.3] ⁽¹⁾

(1) Based on standard factory settings: 5.5 minute brew time; 0% prewet; 200°F water. 1.5 gallon per batch.

(2) 1 or 3 phase configuration is field selectable by user. Sold factory configured for single phase 2 wire plus ground.

Compatible Dispensers

#D009 1.5 Gallon LUXUS® Portable
TPD-15 Thermal Dispenser

Product Dimensions
(HxWxD):
24 1/8" x 9 5/16" x 13 7/8"
[61.3 x 23.7 x 35.2 cm]
Weight (Empty / Filled)
12.8 lbs [5.8 kg] /
24.7 lbs [11.2 kg]



#D449 1.5 Gallon LUXUS®
L4D-15 Thermal Dispenser

Product Dimensions
(HxWxD):
23" x 9" x 13 1/4"
[58.4 x 22.9 x 33.6 cm]
Weight (Empty / Filled)
10.5 lbs [4.8 kg] /
22.4 lbs [10.2 kg]



#D452 1.5 Gallon LUXUS®
L4S-15 Thermal Server*

Product Dimensions
(HxWxD):
14 3/4" x 9" x 12 1/2"
[37.4 x 22.9 x 31.7 cm]
Weight (Empty / Filled)
7.2 lbs [3.3 kg] /
17.6 lbs [8.0 kg]



* Must be used with S4S Serving Stations.

Serving Stations

#A150
S4S-15/20-1
Single Serving Station
for L4S-15 & L4S-20



#A151
S4S-15/20-2
Twin Serving Station
for L4S-15 & L4S-20



#A152
S4S-15/20-3
Triple Serving Station
for L4S-15 & L4S-20



Paper Filter

#F001
15" x 5.5"
Standard Paper
Coffee Filter



Brew Basket

#B001280B1
16" x 6"
Stainless Steel
Brew Basket



#B015280BN2
16" x 6"
Plastic Brew Basket
w/ Brown Insert



Cups per Hour*

8oz. **614** 12oz. **410**
16oz. **307** 20oz. **246**

* Approximate based on maximum power setting.

Colored Brew Basket Handle Inserts



Blue:
1023.00180.00



Red:
1023.00190.00




Green:
1023.00191.00



Orange:
1023.00192.00

Measurements

Height	Width	Depth	Empty Weight	Filled Weight	Combined Filled Weight	Hot Water Tank Cap.	Shipping Weight:	Shipping Dimensions:
36 ³ / ₄ " [93.3 cm]	21 ³ / ₄ " [55.2 cm]	22 ³ / ₄ " [57.7 cm]	77 lbs [35.0 kg]	174 lbs [78.0 kg]	220 lbs [99.0 kg] BREWER + 2 FILLED 140-15 DISPENSERS	11.5 gal [43.0 l]	97 lbs [44.0 kg]	37" x 24" x 27" [94.0 x 61.0 x 68.6 cm]

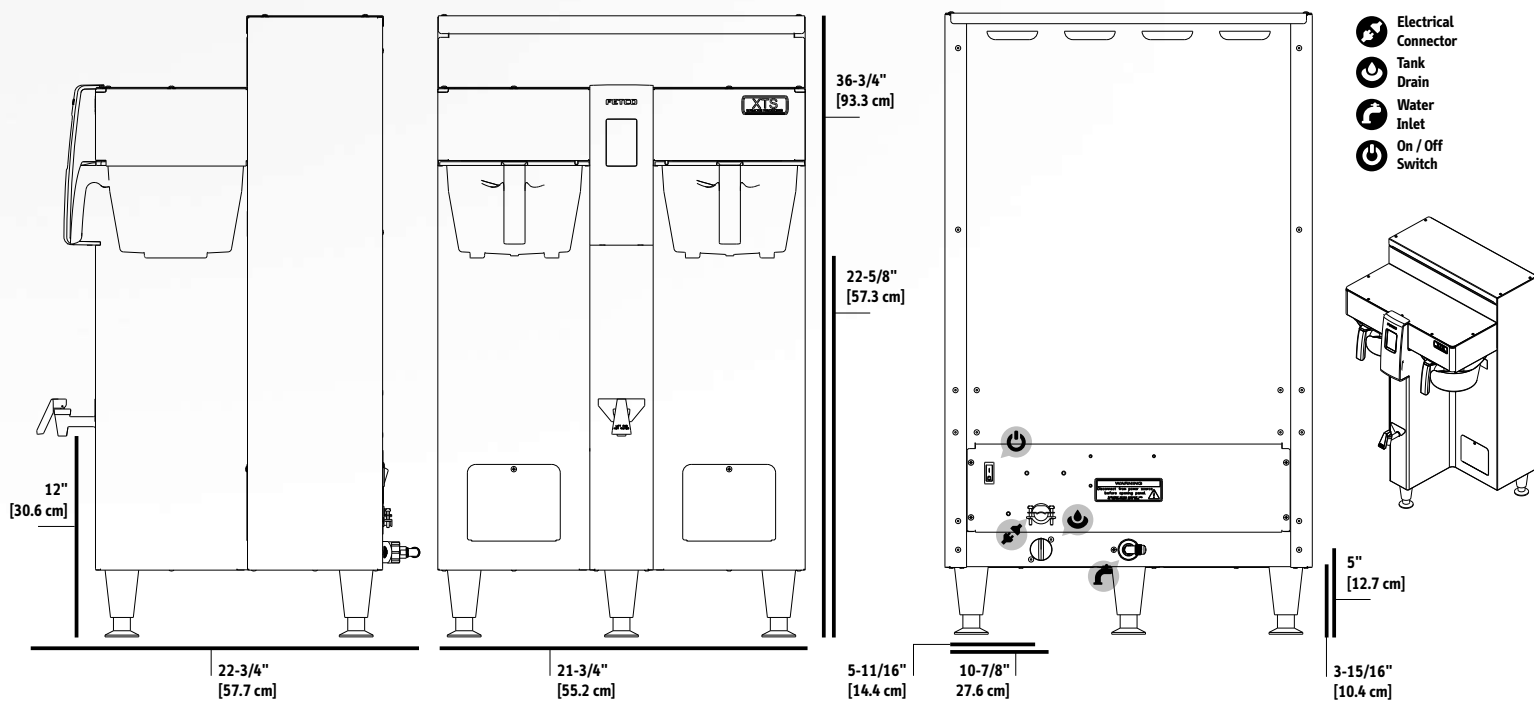

Gallery



Features & Benefits



	Feature	Benefit
1	Touchscreen Interface	Allows for quick and easy access to brew controls.
2	Brew Basket Sensors	Automatically discontinues operation of brew cycle if basket is removed.
3	Mixed Material Construction	Mixed material is attractive and comfortable in any front-of-house setting.
4	Manual Water Faucet	Safely dispenses hot water away from steam and brew basket.
5	Stainless Steel Finish	Withstands the harshest foodservice environments and is durable and easy to clean.

Dispensers sold separately.

FETCO®

© Copyright 2017 FETCO® is a mark of Food Equipment Technologies Company.

#SS14099



fetco.com



info@fetco.com



847.719.3000
1.800.338.2699 USA
847.719.3001



Food Equipment Technologies Co.
600 Rose Road
Lake Zurich, IL 60047
USA