

TABLE OF CONTENTS

EXTRACTOR® Coffee Brewing Systems

CBS-2021eP	.2
CBS-2021eG	.3
CBS-2031e	.4
CBS-2032e	.5
CBS-2031s	.6
CBS-2032s	.7
CBS-2031ee	.8
CBS-2032ee	.9
CBS-2041e	.10
CBS-2042e	.11
CBS-2041ee	.12
CBS-2042ee	.13
CBS-2051e	.14
CBS-2052e	.15
CBS-2052e20	.16

EXTRACTOR® Iced Tea & Iced Coffee Brewing Systems

TBS-21A	.17
---------	-----

Coffee Brewing Systems

CBS-51H-10	.18
CBS-51H-15	.19
CBS-52H-15	.20
CBS-52H-20	.21
CBS-61H	.22
CBS-62H	.23

IP44 Maritime Series

CBS-52H15	.24
CBS-52H20	.25
CBS-62H	.26
HWB-5&HWB-10	.27

High Volume Brewing Systems

CBS-71AC	.28
CBS-72AC	.29
CBS-71A	.30
CBS-72A	.31
TBS-71AC	.32

Coffee Grinders

GR-1.2, GR-1.3, GRF-2.2, GRF-2.3	.33
----------------------------------	-----

Hot Water Dispensers

HWB-2, HWB-5	.34
HWB-10, HWB-15, HWB-25	.35

LUXUS® Thermal Dispensers

L3D, L3S, L3S Series	.36
LD, LS, TPD Series Dispensers	.37

LBD Series

LBD Series Dispensers	.38
-----------------------	-----

Dispensers & Servers	.39
----------------------	-----

Water & Paper Filters, Filter Guide	.40
-------------------------------------	-----

Dispensers, Options, Filters & Accessories Listings	.41
---	-----

Limited Warranty	.42
------------------	-----

Terms of Sale	.43
---------------	-----



FETCO® is one of the leading coffee brewing equipment designers in the world and continues to develop visionary solutions for the coffee industry. The award-winning EXTRACTOR® Series features the patented Pulse-Brew Brewing System with intermittent spray technology to ensure that the body, taste and aroma of the coffee pass into the customer's cup without degradation. A continuous shower or intermittent surges of water can be selected for even and full saturation of the coffee bed. Accurately controlling the contact time allows for precision recipe development. Other innovative features include a Pre-Wetting Cycle that can be turned on or off to assure thorough extraction and external calibration and set up. Adjustable parameters include: Brew Volume, Brew Time, Pre-Wet Percent, Drip Delay, Brew Temperature and Low Temp/No Brew.

After brewing, the portable, insulated stainless steel LUXUS® Thermal Dispensers maintain the coffee's integrity and perfect serving temperature for hours without a heat source. The latest patented technology of the award-winning LUXUS® Thermal Dispensers includes a Freshness Timer™, built-in drip tray and a Volume Indicator™.

CBS-2020 Series



CBS-2021eP 1/2 Gallon EXTRACTOR® Coffee Brewer

The sleek, slim and ultra stylish CBS-2021eP brewer features FETCO's new cascading spray dome system that is the next evolution in spray-over technology plus all the great programmable parameters of the award-winning EXTRACTOR® brewer series.



Brewer Dimensions/Empty Weight
W8-3/4 D17 H21 --17bs

Shipment Dimensions/Weight
W20 D13 H26 --23.3lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/Hr Cold
E20016P	1x2.1 KW	100/130	1	2+G	2.1	14.9/17.8	9.0
*E20026P <i>*Export only</i>	1x3.2 KW	208/240	1	2+G	3.2	11.9/13.6	14.0
Water Inlet (Inch) 3/8 Male Flare	Water Pressure 20-75 psig	Flow Rate .25 gpm					

For use with the following dispensers:



D055 1.9 BOWL SERVER



D059 L3S-05



A134 L3S-05-01 Stand

DISPENSERS

- D055 1.9 Liter Stainless Steel Bowl Server
- D059 0.5 Gallon LUXUS® Thermal Dispenser (L3S-05)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket

- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available

FILTERS

- F007 11 1/4" x 3 3/4" Paper Filters (500 Per Case)
- F003 9 3/4" x 4 1/2" Paper Filters (1000 Per Case)

ACCESSORIES

- A134 Single Serving Station for L3S-05



Our new CBS-2021eP and CBS-2021eG are equipped with the new cascading spray dome for even and full saturation of the coffee bed. And now, clean up is a snap because the spray dome is held in place by a magnet. No tools required for cleaning, no water collects behind the sprayhead.

CBS-2020 Series



CBS-2021eG 1/2 Gallon EXTRACTOR® Coffee Brewer

A taller version of the CBS-2021eP, the CBS-2021eG brews directly in our half gallon dispenser on the stand or into a 3L Airpot. Versatility and stylish good looks make this brewer stand out from the rest.



Brewer Dimensions/Empty Weight
W8-3/4 D17 H27-1/2 --20lbs

Shipment Dimensions/Weight
W20 D13 H33 --27.1bs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR Cold
E20016G	1x2.1 KW	100/130	1	2 + G	2.1	14.9/17.8	9.0
*E20026G	1x3.2 KW	208/240	1	2 + G	3.2	11.9/13.6	14.0
<i>*Export only</i>							
Water Inlet (Inch)		Water Pressure		Flow Rate			
3/8 Male Flare		20-75 psig		.25 gpm			

For use with the following dispensers:



D059 L3S-05



A134 L3S-05-01 Stand



D058 L3D-05

DISPENSERS

- D041 3.0 Liter Stainless Steel Lined Lever Airpot
- D058 0.5 Gallon LUXUS® Thermal Dispenser (L3D-05)
- D059 0.5 Gallon LUXUS® Thermal Dispenser (L3S-05)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket

- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available

FILTERS

- F007 11 1/4" x 3 3/4" Paper Filters (500 Per Case)
- F003 9 3/4" x 4 1/2" Paper Filters (1000 Per Case)

ACCESSORIES

- A134 Single Serving Station for L3S-05



CBS-2030e Series



CBS-2031e Single 1.0 Gallon EXTRACTOR® Coffee Brewer

Versatile and reliable .5 -1.0 gallon brewers are the perfect solution for small to medium-sized operations. Conveniently use lightweight, portable Airpots or our LUXUS® Thermal Dispensers to keep coffee hot for hours. Comes standard with the Cascading Spray Dome™.

Brewer Dimensions/Empty Weight
W11 D18 1/4 H26 --35bs

Shipment Dimensions/Weight
W16 D20 H26 --42lbs

For use with the following dispensers:



D051 L3S-10



D041 3.0 SS LINED AIRPOT



D037 1.9 SS LINED SERVER

Electrical Configuration	Heater Configuration Code	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR	
							Cold Water	Hot Water
E31045 ⁽¹⁾	1x1.5 KW	120	1	2+G	1.6	13.0	4.9	11.0
	2x1.5 KW	120/208		3+G	2.4	11.3	7.3	11.0
		120/220			2.6	12.0	8.2	11.0
		120/240			3.1	13.0	9.7	11.0
E31035 ⁽¹⁾	1X1.7 KW	120	1	2+G	1.8	14.7	5.5	11.0
	2X1.7KW	120/208		3+G	2.7	12.8	8.3	11.0
		120/220			3.0	13.5	9.2	11.0
		120/240			3.5	14.7	11.0	11.0
E31015 ⁽¹⁾	1X2.3 KW	120	1	2+G	2.4	19.7	7.4	11.0
	2X2.3 KW	120/208		3+G	3.6	17.1	11.0	11.0
		120/220			4.1	18.1	11.0	11.0
		120/240			4.7	19.7	11.0	11.0
*E31025	1X3.0 KW	220/240	1	2+G	2.6/3.1	12/13	9.7	11.0
<i>*Export only</i>								
Water Inlet (Inch)		Water Pressure		Flow Rate				
3/8 Male Flare		20-75 psig		0.25 gpm				

(1) Can be connected to 120 VAC (Factory Setting) or 120/208-240 VAC

(2) Based on standard factory settings: 4.0 minute brew time: 0% prewet: 200°F water

DISPENSERS

- D037 1.9 Liter Stainless Steel Lined Server
- D041 3.0 Liter Stainless Steel Lined Lever Airpot
- D051 1.0 Gallon LUXUS® Thermal Dispenser (L3S-10)

OPTIONS

- Z005 Color Coded Dispenser Faucet
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available

FILTERS

- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A015 Round Drip Tray
- A034 2 Station Airpot Rack with Drip Tray
- A035 3 Station Airpot Rack with Drip Tray
- A036 5 Station Airpot Rack with Drip Tray
- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge
- A093 Single Serving Station for L3S-10 (S3S-10-1)
- A094 Twin Serving Station for L3S-10 (S3S-10-2)
- A096 Triple Serving Station for L3S-10 (S3S-10-3)
- A103 Square Brew Basket
- A112 Airpot Hot Tea Infuser
- A113 1.0 Gallon Hot Tea Infuser
- A120 Quad Serving Station for L3S-10 (S3S-10-4)



CBS-2030e Series



CBS-2032e Twin 1/2 to 1.0 Gallon EXTRACTOR® Coffee Brewer

Still as versatile and reliable as the 2031 with .5 -1.0 gallon brewers that are the perfect solution for small to medium-sized operations, but with twice the brewing power. Use the lightweight, portable airpots or our LUXUS® Thermal Dispensers to keep coffee hot for hours. Comes standard with the Cascading Spray Dome™.

Brewer Dimensions/Empty Weight
W19 D18-1/4 H26 --53lbs

Shipment Dimensions/Weight
W24 D23 H26 --64lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR Batches/HR (1)	
							Cold Water	Hot Water
E32015	2x3.0 KW	120/208	1	3+G	4.6	22.4	14.6	22.0
		120/220			5.1	23.7	16.9	22.0
		120/240			6.1	25.8	19.4	22.0
*E32025	2X3.0 KW	220/240	1	2+G	5.1/6.1	23.7/25.8	19.4	22.0
<i>*Export only</i>								
Water Inlet (Inch)		Water Pressure		Flow Rate				
3/8 Male Flare		20-75 psig		0.5 gpm				

(1) Based on standard factory settings: 4.0 minute brew time: 0% prewet: 200°F water

For use with the following dispensers:



D051 L3S-10



D041 3.0 SS LINED AIRPOT



D037 1.9 SS LINED SERVER

DISPENSERS

- D037 1.9 Liter Stainless Steel Lined Server
- D041 3.0 Liter Stainless Steel Lined Lever Airpot
- D051 1.0 Gallon LUXUS® Thermal Dispenser (L3S-10)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available

FILTERS

- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A015 Round Drip Tray
- A034 2 Station Airpot Rack with Drip Tray
- A035 3 Station Airpot Rack with Drip Tray
- A036 5 Station Airpot Rack with Drip Tray
- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge
- A093 Single Serving Station for L3S-10 (S3S-10-1)
- A094 Twin Serving Station for L3S-10 (S3S-10-2)
- A096 Triple Serving Station for L3S-10 (S3S-10-3)
- A103 Square Brew Basket
- A112 Airpot Hot Tea Infuser
- A113 1.0 Gallon Hot Tea Infuser
- A120 Quad Serving Station for L3S-10 (S3S-10-4)



CBS-2030s Series with Brew Basket Lock & Bypass



CBS-2031s Single 1.0 Gallon EXTRACTOR® Coffee Brewer

Fully equipped with brew basket lock, bypass and square brew baskets. Use lightweight, portable Airpots or our LUXUS® Thermal Dispensers to keep coffee hot and fresh for hours. Comes standard with the Cascading Spray Dome™.

Brewer Dimensions/Empty Weight
W11 D18 1/4 H26 --35bs

Shipment Dimensions/Weight
W16 D20 H26 --42lbs

For use with the following dispensers:



D051 L3S-10



D041 3.0 SS LINED AIRPOT



D037 1.9 SS LINED SERVER

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp	Draw	Batches/HR Batches/HR ⁽²⁾	
								Cold Water	Hot Water
E31045S ⁽¹⁾	1x1.5 KW	120	1	2+G	1.6	13.0		4.9	11.0
	2x1.5 KW	120/208		3+G	2.4	11.3		7.3	11.0
		120/220			2.6	12.0		8.2	11.0
		120/240			3.1	13.0		9.7	11.0
E31035S ⁽¹⁾	1X1.7 KW	120	1	2+G	1.8	14.7		5.5	11.0
	2X1.7KW	120/208		3+G	2.7	12.8		8.3	11.0
		120/220			3.0	13.5		9.2	11.0
		120/240			3.5	14.7		11.0	11.0
E31015S ⁽¹⁾	1X2.3 KW	120	1	2+G	2.4	19.7		7.4	11.0
	2X2.3 KW	120/208		3+G	3.6	17.1		11.0	11.0
		120/220			4.1	18.1		11.0	11.0
		120/240			4.7	19.7		11.0	11.0

Water Inlet (Inch) **3/8 Male Flare** Water Pressure **20-75 psig** Flow Rate **0.25 gpm**

(1) Can be connected to 120 VAC (Factory Setting) or 120/208-240 VAC
 (2) Based on standard factory settings: 4.0 minute brew time: 0% prewet: 200°F water

DISPENSERS

- D037 1.9 Liter Stainless Steel Lined Server
- D041 3.0 Liter Stainless Steel Lined Lever Airpot
- D051 1.0 Gallon LUXUS® Thermal Dispenser (L3S-10)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available
- Z064 2031S Basket Lock & Bypass Upgrade

FILTERS

- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A015 Round Drip Tray
- A034 2 Station Airpot Rack with Drip Tray
- A035 3 Station Airpot Rack with Drip Tray
- A036 5 Station Airpot Rack with Drip Tray
- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge
- A093 Single Serving Station for L3S-10 (S3S-10-1)
- A094 Twin Serving Station for L3S-10 (S3S-10-2)
- A096 Triple Serving Station for L3S-10 (S3S-10-3)
- A103 Square Brew Basket
- A112 Airpot Hot Tea Infuser
- A113 1.0 Gallon Hot Tea Infuser
- A120 Quad Serving Station for L3S-10 (S3S-10-4)



CBS-2030s Series with Brew Basket Lock & Bypass

CBS-2032s Twin 1.0 Gallon EXTRACTOR® Coffee Brewer

Twin brewer that's fully equipped with brew basket lock, bypass and square brew baskets. Use lightweight, portable Airpots or our LUXUS® Thermal Dispensers to keep coffee hot and fresh for hours. Comes standard with the Cascading Spray Dome™.



Brewer Dimensions/Empty Weight
W19 D18-1/4 H26--53lbs

Shipment Dimensions/Weight
W24 D23 H26 --64lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR Batches/HR ⁽¹⁾	
							Cold Water	Hot Water
E32015S	2x3.0 KW	120/208	1	3+G	4.6	22.4	14.6	22.0
		120/220			5.1	23.7	16.9	22.0
		120/240			6.1	25.8	19.4	22.0
Water Inlet (Inch) 3/8 Male Flare		Water Pressure 20-75 psig		Flow Rate 0.5 gpm				

(1) Based on standard factory settings: 4.0 minute brew time: 0% prewet: 200°F water

For use with the following dispensers:



D051 L3S-10



D041 3.0 SS LINED AIRPOT



D037 1.9 SS LINED SERVER

DISPENSERS

- D037 1.9 Liter Stainless Steel Lined Server
- D041 3.0 Liter Stainless Steel Lined Lever Airpot
- D051 1.0 Gallon LUXUS® Thermal Dispenser (L3S-10)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available
- Z063 2032S Basket Lock & Bypass Upgrade

FILTERS

- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A015 Round Drip Tray
- A034 2 Station Airpot Rack with Drip Tray
- A035 3 Station Airpot Rack with Drip Tray
- A036 5 Station Airpot Rack with Drip Tray
- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge
- A093 Single Serving Station for L3S-10 (S3S-10-1)
- A094 Twin Serving Station for L3S-10 (S3S-10-2)
- A096 Triple Serving Station for L3S-10 (S3S-10-3)
- A103 Square Brew Basket
- A112 Airpot Hot Tea Infuser
- A113 1.0 Gallon Hot Tea Infuser
- A120 Quad Serving Station for L3S-10 (S3S-10-4)



CBS-2030ee Series



CBS-2031ee Single 1.0 Gallon EXTRACTOR® Coffee Brewer

The ECO Mode feature decreases the water temperature setpoint by -30° F after 1-hour of non-use. When in the ECO mode, the user simply presses the STOP button to return to normal operation.

Easier to service: (a) Set threshold for the level control in program mode. (b) Easily test ON/OFF button (c) Display the resistance between the level probe and tank common

Manual hot water faucet delivers fresh, steaming hot water when you need it.

Comes with standard round brew basket and Cascading Spray Dome™. Show with square brew basket accessory.

Brewer Dimensions/Empty Weight
W11 D18 1/4 H26 --35bs

Shipment Dimensions/Weight
W16 D20 H26 --42lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR Batches/HR ⁽¹⁾	
							Cold Water	Hot Water
E31015E ⁽¹⁾	1X2.3 KW	120	1	2+G	2.4	19.7	7.4	11.0
Water Inlet (Inch)		Water Pressure		Flow Rate				
3/8 Male Flare		20-75 psig		0.25 gpm				

(1) Based on standard factory settings: 4.0 minute brew time: 0% prewet: 200°F water

For use with the following dispensers:



D051 L3S-10



D041 3.0 SS LINED AIRPOT



D037 1.9 SS LINED SERVER

DISPENSERS

- D037 1.9 Liter Stainless Steel Lined Server
- D041 3.0 Liter Stainless Steel Lined Lever Airpot
- D051 1.0 Gallon LUXUS® Thermal Dispenser (L3S-10)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available
- Z064 2031S Basket Lock & Bypass Upgrade

FILTERS

- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A015 Round Drip Tray
- A034 2 Station Airpot Rack with Drip Tray
- A035 3 Station Airpot Rack with Drip Tray
- A036 5 Station Airpot Rack with Drip Tray
- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge
- A093 Single Serving Station for L3S-10 (S3S-10-1)
- A094 Twin Serving Station for L3S-10 (S3S-10-2)
- A096 Triple Serving Station for L3S-10 (S3S-10-3)
- A103 Square Brew Basket
- A112 Airpot Hot Tea Infuser
- A113 1.0 Gallon Hot Tea Infuser
- A120 Quad Serving Station for L3S-10 (S3S-10-4)



CBS-2030ee Series



CBS-2032ee Twin 1/2 to 1.0 Gallon EXTRACTOR® Coffee Brewer

The ECO mode feature decreases the water temperature setpoint by -30° F after 1-hour of non-use. When in the ECO mode, the user simply presses the STOP button to return to normal operation.

Easier to service: (a) Set threshold for the level control in program mode. (b) Easily test ON/OFF button (c) Display the resistance between the level probe and tank common

Manual hot water faucet delivers fresh, steaming hot water when you need it.

Comes with standard round brew basket and Cascading Spray Dome™. Show with square brew basket accessory.

Brewer Dimensions/Empty Weight
W19 D18-1/4 H26--53lbs

Shipment Dimensions/Weight
W24 D23 H26 --64lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR Batches/HR (1)	
							Cold Water	Hot Water
E32015E	2x3.0 KW	120/208	1	3+G	4.6	22.4	14.6	22.0
		120/220			5.1	23.7	16.9	22.0
		120/240			6.1	25.8	19.4	22.0
Water Inlet (Inch)		Water Pressure		Flow Rate				
3/8 Male Flare		20-75 psig		0.5 gpm				

(1) Based on standard factory settings: 4.0 minute brew time: 0% prewet: 200°F water

For use with the following dispensers:



D051 L3S-10



D041 3.0 SS LINED AIRPOT



D037 1.9 SS LINED SERVER

DISPENSERS

- D037 1.9 Liter Stainless Steel Lined Server
- D041 3.0 Liter Stainless Steel Lined Lever Airpot
- D051 1.0 Gallon LUXUS® Thermal Dispenser (L3S-10)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available
- Z063 2032S Basket Lock & Bypass Upgrade

FILTERS

- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A015 Round Drip Tray
- A034 2 Station Airpot Rack with Drip Tray
- A035 3 Station Airpot Rack with Drip Tray
- A036 5 Station Airpot Rack with Drip Tray
- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge
- A093 Single Serving Station for L3S-10 (S3S-10-1)
- A094 Twin Serving Station for L3S-10 (S3S-10-2)
- A096 Triple Serving Station for L3S-10 (S3S-10-3)
- A103 Square Brew Basket
- A112 Airpot Hot Tea Infuser
- A113 1.0 Gallon Hot Tea Infuser
- A120 Quad Serving Station for L3S-10 (S3S-10-4)



CBS-2040e Series



CBS-2041e Single 1.0 Gallon EXTRACTOR® Coffee Brewer

Brew directly into our self-serve LUXUS® Thermal Dispensers to serve hot, fresh, aromatic coffee for hours. Comes standard with the Cascading Spray Dome™.

Brewer Dimensions/Empty Weight
W11 D18-1/4 H34-1/4 --46lbs

Shipment Dimensions/Weight
W14 D23 H36 --54lbs

For use with the following dispensers:



D048 L3D-10



D051 L3S-10

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp	Draw	Batches/HR Batches/HR ⁽²⁾	
								Cold Water	Hot Water
E41046 ⁽¹⁾	1x1.5 KW	120	1	2+G	1.6	13.0		3.8	9.3
	2x1.5 KW	120/208		3+G	2.4	11.3		5.8	11.0
		120/220			2.6	12.0		6.5	11.0
		120/240			3.1	13.0		7.7	11.0
E41036 ⁽¹⁾	1X1.7 KW	120	1	2+G	1.8	14.7		4.4	9.3
	2X1.7KW	120/208		3+G	2.7	12.8		6.5	11.0
		120/220			3.0	13.5		7.3	11.0
		120/240			3.5	14.7		8.7	11.0
E41016 ⁽¹⁾	1X2.3 KW	120	1	2+G	2.4	19.7		5.8	9.3
	2X2.3 KW	120/208		3+G	3.6	17.1		8.9	11.0
		120/220			4.1	18.1		9.9	11.0
		120/240			4.7	19.7		11.0	11.0
*E41026	1X3.0 KW	220/240	1	2+G	2.6/3.1	12/13		7.7	11.0
<i>*Export only</i>									
Water Inlet (Inch)		Water Pressure		Flow Rate					
3/8 Male Flare		20-75 psig		1.0 gpm					

⁽¹⁾ Can be connected to 120 VAC (Factory Setting) or 120/208-240 VAC

⁽²⁾ Based on standard factory settings: 4.0 minute brew time: 0% prewet: 200°F water

DISPENSERS

- D048 1.0 Gallon LUXUS® Thermal Dispenser (L3D-10)
- D051 1.0 Gallon LUXUS® Thermal Dispenser (L3S-10)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available

FILTERS

- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge
- A093 Single Serving Station for L3S-10 (S3S-10-1)
- A094 Twin Serving Station for L3S-10 (S3S-10-2)
- A096 Triple Serving Station for L3S-10 (S3S-10-3)
- A103 Square Brew Basket
- A113 1.0 Gallon Hot Tea Infuser
- A120 Quad Serving Station for L3S-10 (S3S-10-4)



CBS-2040e Series



CBS-2042e Twin 1.0 Gallon EXTRACTOR® Coffee Brewer

Consistent, flavorful coffee every time. How? Because you are in control of the brew time, the contact time and the pre-wet cycle. Comes standard with the Cascading Spray Dome™.

Brewer Dimensions/Empty Weight
W19 D18-1/4 H34-1/4 --60lbs

Shipment Dimensions/Weight
W23 D23 H36 --76lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR Batches/HR ⁽¹⁾	
							Cold Water	Hot Water
E42016	2x3.0 KW	120/208	1	3+G	4.6	22.4	11.5	22.0
		120/220			5.1	23.7	12.9	22.0
		120/240			6.1	25.8	15.4	22.0
*E42026 *Export only	2X3.0 KW	220/240	1	2+G	5.1/6.1	23.7/25.8	15.4	22.0
Water Inlet (Inch)		Water Pressure		Flow Rate				
3/8 Male Flare		20-75 psig		1.5 gpm				

(1) Based on standard factory settings: 4.0 minute brew time: 0% prewet: 200°F water

For use with the following dispensers:



D048 L3D-10



D051 L3S-10

DISPENSERS

- D048 1.0 Gallon LUXUS® Thermal Dispenser (L3D-10)
- D051 1.0 Gallon LUXUS® Thermal Dispenser (L3S-10)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available

FILTERS

- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge
- A093 Single Serving Station for L3S-10 (S3S-10-1)
- A094 Twin Serving Station for L3S-10 (S3S-10-2)
- A096 Triple Serving Station for L3S-10 (S3S-10-3)
- A103 Square Brew Basket
- A113 1.0 Gallon Hot Tea Infuser
- A120 Quad Serving Station for L3S-10 (S3S-10-4)



CBS-2040ee Series ECO Series



CBS-2041ee Single 1.0 Gallon EXTRACTOR® Coffee Brewer

The ECO mode feature decreases the water temperature setpoint by -30° F after 1-hour of non-use. When in the ECO mode, the user simply presses the STOP button to return to normal operation.

Easier to service: (a) Set threshold for the level control in program mode. (b) Easily test ON/OFF button (c) Display the resistance between the level probe and tank common

Manual hot water faucet delivers fresh, steaming hot water when you need it.

Comes with standard round brew basket and Cascading Spray Dome™. Show with square brew basket accessory.

Brewer Dimensions/Empty Weight
W11 D18-1/4 H34-1/4 --46lbs

Shipment Dimensions/Weight
W14 D23 H36 --54lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR Batches/HR ⁽¹⁾	
							Cold Water	Hot Water
E41016E	1X2.3 KW	120	1	2+G	2.4	19.7	5.8	9.3
Water Inlet (Inch)		Water Pressure		Flow Rate				
3/8 Male Flare		20-75 psig		1.0 gpm				

(1) Based on standard factory settings: 4.0 minute brew time: 0% prewet: 200°F water

For use with the following dispensers:



D048 L3D-10



D051 L3S-10

DISPENSERS

- D048 1.0 Gallon LUXUS® Thermal Dispenser (L3D-10)
- D051 1.0 Gallon LUXUS® Thermal Dispenser (L3S-10)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available

FILTERS

- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge
- A093 Single Serving Station for L3S-10 (S3S-10-1)
- A094 Twin Serving Station for L3S-10 (S3S-10-2)
- A096 Triple Serving Station for L3S-10 (S3S-10-3)
- A103 Square Brew Basket
- A113 1.0 Gallon Hot Tea Infuser
- A120 Quad Serving Station for L3S-10 (S3S-10-4)



CBS-2040ee Series ECO Series



CBS-2042ee Twin 1.0 Gallon EXTRACTOR® Coffee Brewer

The ECO Mode feature decreases the water temperature setpoint by -30° F after 1-hour of non-use. When in the ECO mode, the user simply presses the STOP button to return to normal operation.

Easier to service: (a) Set threshold for the level control in program mode. (b) Easily test ON/OFF button (c) Display the resistance between the level probe and tank common

Manual hot water faucet delivers fresh, steaming hot water when you need it.

Comes with standard round brew basket and Cascading Spray Dome™. Show with square brew basket accessory.

Brewer Dimensions/Empty Weight
W19 D18-1/4 H34-1/4 --60lbs

Shipment Dimensions/Weight
W23 D23 H36 --76lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR Batches/HR ⁽¹⁾	
							Cold Water	Hot Water
E42016E	2x3.0 KW	120/208	1	3+G	4.6	22.4	11.5	22.0
		120/220			5.1	23.7	12.9	22.0
		120/240			6.1	25.8	15.4	22.0
Water Inlet (Inch)		Water Pressure		Flow Rate				
3/8 Male Flare		20-75 psig		1.5 gpm				

(1) Based on standard factory settings: 4.0 minute brew time: 0% prewet: 200°F water

For use with the following dispensers:



D048 L3D-10



D051 L3S-10

DISPENSERS

- D048 1.0 Gallon LUXUS® Thermal Dispenser (L3D-10)
- D051 1.0 Gallon LUXUS® Thermal Dispenser (L3S-10)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available

FILTERS

- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge
- A093 Single Serving Station for L3S-10 (S3S-10-1)
- A094 Twin Serving Station for L3S-10 (S3S-10-2)
- A096 Triple Serving Station for L3S-10 (S3S-10-3)
- A103 Square Brew Basket
- A113 1.0 Gallon Hot Tea Infuser
- A120 Quad Serving Station for L3S-10 (S3S-10-4)



CBS-2050e Series



CBS-2051e Single 1.5 Gallon EXTRACTOR® Coffee Brewer

Our LUXUS® 1.5 gallon Thermal Dispensers do not need an electric power source to maintain serving temperature. Coffee stays fresh and hot for hours. Comes standard with the Cascading Spray Dome™.

Brewer Dimensions/Empty Weight
W12-3/4 D20-3/8 H37-1/4 --55lbs

Shipment Dimensions/Weight
W14 D23 H36 --64lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR Batches/HR ⁽¹⁾	
							Cold Water	Hot Water
E51016	2x3.0 KW	120/208	1	3+G	4.6	22.1	7.7	11.0
		120/220			5.1	23.4	8.6	11.0
		120/240			6.1	25.5	10.3	11.0
*E51026 *Export only	2X3.0 KW	220/240	1	2+G	5.1/6.1	23.4/25.8	10.3	11.0
Water Inlet (Inch)		Water Pressure		Flow Rate				
3/8 Male Flare		20-75 psig		1.0 gpm				

(1) Based on standard factory settings: 4.0 minute brew time: 0% prewet: 200°F water

For use with the following dispensers:



D049 L3D-15



D052 L3S-15



D009 TPD-15



D010 LD-15



D014 LS-15

DISPENSERS

- D009 1.5 Gallon LUXUS® Thermal Dispenser (TPD-15)
- D010 1.5 Gallon LUXUS® Thermal Dispenser (LD-15)
- D014 1.5 Gallon LUXUS® Thermal Dispenser (LS-15)
- D049 1.5 Gallon LUXUS® Thermal Dispenser (L3D-15)
- D052 1.5 Gallon LUXUS® Thermal Dispenser (L3S-15)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available

FILTERS

- F001 15" x 51/2" Paper Filters (500 Per Case)

ACCESSORIES

- A010 Airpot Brewing Stand 9" (BS-2)
- A011 Single Serving Station for LS-15 (SS-1)
- A012 Twin Serving Station for LS-15 (SS-2)
- A013 Triple Serving Station for LS-15 (SS-3)
- A015 Round Drip Tray
- A039 In Line Water Filter with Cartridge
- A069 Identifier Plates, Acrylic
- A075 Replacement Water Filter Cartridge
- A097 Single Serving Station for L3S-15 & L3S-20 (S3S-15/20-1)
- A098 Twin Serving Station for L3S-15 & L3S-20 (S3S-15/20-2)
- A099 Triple Serving Station for L3S-15 & L3S-20 (S3S-15/20-3)
- A104 Iced Tea Brew Basket (16" x 6")
- A113 1.5 Gallon Hot Tea Infuser
- A129 Quad Serving Station for L3S-15 & L3S-20 (S3S-15/20-4)



CBS-2050e Series



CBS-2052e Twin 1.5 Gallon EXTRACTOR® Coffee Brewer

The patented Pulse-Brew intermittent shower brewing system lets you control the amount of time the water is in contact with the ground coffee for perfectly balanced strength and extraction according to your recipe. Comes standard with the Cascading Spray Dome™.

Brewer Dimensions/Empty Weight
W21-7/8 D19-1/8 H37-1/4 --92lbs

Shipment Dimensions/Weight
W23 D25 H38 --102bs

For use with the following dispensers:



D049 L3D-15



D052 L3S-15



D009 TPD-15



D010 LD-15



D014 LS-15

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR	
							Cold Water	Hot Water
E52016 ⁽¹⁾	2x3.0 KW ⁽²⁾	120/208	1	3+G	4.6	22.1	7.7	18.6
		120/220			5.1	23.4	8.6	21.6
		120/240			6.1	25.5	10.3	22.0
	3x3.0 KW	120/208	3	4+G	6.9	19.5	11.5	22.0
		120/220			7.7	20.6	12.9	22.0
		120/240			9.1	22.5	15.4	22.0
E52026 ⁽¹⁾	2x5.0 KW	120/208	1	3+G	7.6	36.9	12.8	22.0
		120/220			8.5	39.0	14.4	22.0
		120/240			10.1	42.5	17.1	22.0
	3x5.0 KW ⁽²⁾	120/208	3	4+G	11.4	32.0	19.2	22.0
120/220				12.7	33.9	22.0	22.0	
120/240				15.1	36.9	22.0	22.0	
*E52036	2X3.0 KW	220/240	1	2+G	5.1/6.1	23.7/25.8	10.3	22.0
*E52046	3X3.0 KW	220/380	3	3+G	7.7	11.2	15.4	22.0
*E52056 <i>*Export only</i>	3X3.0 KW	240/415	3	4+G	9.1	12.7	15.4	22.0

Water Inlet (Inch) **3/8 Male Flare** Water Pressure **20-75 psig** Flow Rate **1.5 gpm**

(1) Universal wiring/Multi-phase wiring

(2) Factory Setting

(3) Based on standard factory settings: 4.0 minute brew time; 9% prewet; 200°F water

DISPENSERS

- D009 1.5 Gallon LUXUS® Thermal Dispenser (TPD-15)
- D010 1.5 Gallon LUXUS® Thermal Dispenser (LD-15)
- D014 1.5 Gallon LUXUS® Thermal Dispenser (LS-15)
- D049 1.5 Gallon LUXUS® Thermal Dispenser (L3D-15)
- D052 1.5 Gallon LUXUS® Thermal Dispenser (L3S-15)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available
- Z056 Three Phase Electrical

FILTERS

- F001 15" x 51/2" Paper Filters (500 Per Case)

ACCESSORIES

- A010 Airpot Brewing Stand 9" (BS-2)
- A011 Single Serving Station for LS-15 (SS-1)
- A012 Twin Serving Station for LS-15 (SS-2)
- A013 Triple Serving Station for LS-15 (SS-3)
- A015 Round Drip Tray
- A039 In Line Water Filter with Cartridge
- A069 Identifier Plates, Acrylic
- A075 Replacement Water Filter Cartridge
- A097 Single Serving Station for L3S-15 & L3S-20 (S3S-15/20-1)
- A098 Twin Serving Station for L3S-15 & L3S-20 (S3S-15/20-2)
- A099 Triple Serving Station for L3S-15 & L3S-20 (S3S-15/20-3)
- A104 Iced Tea Brew Basket (16" x 6")
- A113 1.5 Gallon Hot Tea Infuser
- A129 Quad Serving Station for L3S-15 & L3S-20 (S3S-15/20-4)



CBS-2050e Series



CBS-2052e20 Twin 2.0 Gallon EXTRACTOR® Coffee Brewer

The patented Pulse-Brew intermittent shower brewing system lets you control the amount of time the water is in contact with the ground coffee for perfectly balanced strength and extraction according to your recipe. Comes standard with the Cascading Spray Dome™.

Brewer Dimensions/Empty Weight
W21-7/8 D19-1/8 H39-3/8 --95lbs

Shipment Dimensions/Weight
W25 D23 H38 --102lbs

For use with the following dispensers:



D050 L3D-20



D053 L3S-20

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR ⁽³⁾	
							Cold Water	Hot Water
E53016 ⁽¹⁾	2x3.0 KW ⁽²⁾	120/208	1	3+G	4.6	22.4	7.7	18.6
		120/220			5.1	23.4	8.6	21.6
		120/240			6.1	25.5	10.3	22.0
	3x3.0 KW	120/208	3	4+G	6.9	19.5	11.5	22.0
		120/220			7.7	20.6	12.9	22.0
		120/240			9.1	22.5	15.4	22.0
		E53026 ⁽¹⁾			2x5.0 KW	120/208	1	3+G
	120/220		8.5	39.0	14.4	22.0		
	120/240		10.1	42.5	17.1	22.0		
	3x5.0 KW ⁽²⁾	120/208	3	4+G	11.4	32.0	19.2	22.0
		120/220			12.7	33.9	22.0	22.0
		120/240			15.1	36.9	22.0	22.0
*E53036	2X3	220/240	1	2+G	5.1/6.1	23.7/25.8	10.3	22.0
*E53046	3X5	220/380	3	3+G	12.7	19.3	22.0	22.0
*E53056	3X5	240/415	3	4+G	15.1	21	22.0	22.0
<i>*Export only</i>								
Water Inlet (Inch)	Water Pressure	Flow Rate						
3/8 Male Flare	20-75 psig	1.5 gpm						

(1) Universal wiring/Multi-phase wiring

(2) Factory Setting

(3) Based on standard factory settings: 4.0 minute brew time; 9% prewet; 200°F water

DISPENSERS

- D050 2.0 Gallon LUXUS® Thermal Dispenser(L3D-20)
- D053 2.0 Gallon LUXUS® Thermal Dispenser (L3S-20)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available
- Z056 Three Phase Electrical

ACCESSORIES

- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge
- A097 Single Serving Station for L3S-15 & L3S-20 (S3S-15/20-1)
- A098 Twin Serving Station for L3S-15 & L3S-20 (S3S-15/20-2)
- A099 Triple Serving Station for L3S-15 & L3S-20 (S3S-15/20-3)
- A104 Iced Tea Brew Basket (16" x 6")
- A129 Quad Serving Station for L3S-15 & L3S-20 (S3S-15/20-4)

FILTERS

- F001 15" x 5 1/2" Paper Filters (500 Per Case)



TBS Series



TBS-21A Single 3.0 Gallon EXTRACTOR® Iced Tea Brewer

The secret to the perfect tasting glass of iced tea or hot tea is to have optimal steep time. No matter what type of tea you are brewing – black chai, green -- the TBS-21A utilizes the patented intermittent spray over feature to control the contact time with the tea leaves to deliver the freshest tea. By allowing dilution at the end of the brew cycle (with or without delay) or during the brew cycle (in between sprays), it gives you total control over the final product. Easily program up to 2 batches in 2 volume sizes – 1.0 gallon or 3.0 gallon. Comes standard with the Cascading Spray Dome™.

TBS-21A Single 3.0 Gallon EXTRACTOR® Iced Coffee Brewer

Brew iced coffee directly into our ITD-30 dispenser for a refreshing beverage that will keep them coming back.

TBS-21A Single 3.0 Gallon EXTRACTOR® Iced Tea & Coffee Combo Brewer

Program this versatile brewer to brew iced tea into FETCO's ITD-30 dispenser and hot coffee or hot tea into a LUXUS® Thermal Dispenser or Airpot.

Brewer Dimensions/Empty Weight
W12 -3/4 D20-1/8 H34-1/8 --40lbs

Shipment Dimensions/Weight
W18 D23 H36 --50lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches ⁽¹⁾ per Hour
E21016	1x2.1KW	120	1	2+G	2.2	18.0	6.0
*E21026, <i>Export only</i>	1X2.7KW	220/240	1	2+G	2.4/2.8	10.8/11.8	6.0
Water Inlet (Inch)		Water Pressure		Flow Rate			
3/8 Male Flare		20-75 psig		1.5 gpm			

(1) Based on standard factory settings

For use with the following dispensers:



D031 ITD-30



D041 3.0 SS LINED AIRPOT

DISPENSERS

- D031 3.0 Gallon Iced Tea/Iced Coffee Dispenser (ITD-30)
- D041 3.0 Liter Stainless Steel Lined Lever Airpot

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z054⁽¹⁾ Conversion for Coffee or Hot Tea (3.0 Liter)
- Z055 Export Voltages Available

(1) Takes Place of Second Batch includes Controls & Brew Stand for Airpot

FILTERS

- F001 15" x 51/2" Paper Filters (500 Per Case)

ACCESSORIES

- A015 Round Drip Tray
- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge
- A095 Airpot Brewing Stand (BS-5)
- A108 Coffee Brew Basket (16" x 6")
- A112 Airpot Hot Tea Infuser

Coffee Brewers 5000 Series

Reliable, durable performance day after day. FETCO® designs each brewer to deliver hot, fresh aromatic coffee that tastes as good from the first cup to the last.

CBS-5000 Series



CBS-51H-10 Single 1.0 Gallon Coffee Brewer

The CBS-51H features a dual brew basket lock incorporated into the start switch, constant water temperature during 100% of the brew cycle, spray-over volume consistency and a dispense tube system that resists lime build up. Brew directly into the 1.0 gallon LUXUS® Thermal Dispenser for a remote dispensing station that can be staff operated or self-service.

Brewer Dimensions/Empty Weight
W12 D20-3/4 H29-7/8 --42lbs

Shipment Dimensions/Weight
W14 D21 H31 --48lbs

Electrical Configuration	Heater Configuration Code	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/Hr					
							Cold Water	Hot Water				
C50016	1x1.8 KW	120	1	2+G	1.9	15.5	4.5	10.3				
C50026	2x1.8 KW	120/208	1	3+G	3.1	13.5	6.7	13.0				
		120/220							3.4	14.7	7.8	13.0
		120/240							4.1	15.5	8.9	13.0
*C50036	2X1.8 KW	220	1	2+G	3.1	14.2	8.9	13.0				
*C50046	2X2.3 KW	220/240	1	2+G	4.0/4.7	18.1/19.7	8.9	13.0				
<i>*Export only</i>												
Water Inlet (Inch)		Water Pressure		Flow Rate								
3/8 Male Flare		20-75 psig		0.5 gpm								

For use with the following dispensers:



D008 LD-10



D013 LS-10

DISPENSERS

- D008 1.0 Gallon LUXUS® Thermal Dispenser (LD-10)
- D013 1.0 Gallon LUXUS® Thermal Dispenser (LS-10)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange (Standard Black)
- Z026 Two Portion Option Single
- Z027 Iced Tea Brew Package
(LD-10 Dispenser, Brew Basket & Controls)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available
- Z058 Water Sensitivity Set For Reverse Osmosis
(100K Ohm)

FILTERS

- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A009 Brewing Stand for LS-10 (BS-1)
- A011 Single Serving Station for LS-10 (SS-1)
- A012 Twin Serving Station for LS-10 (SS-2)
- A013 Triple Serving Station for LS-10 (SS-3)
- A015 Round Drip Tray
- A039 In Line Water Filter with Cartridge
- A069 Identifier Plates, Acrylic
- A075 Replacement Water Filter Cartridge
- A082 Iced Tea Brew Basket (13" x 5")
- A113 1.0/1.5 Gallon Hot Tea Infuser

CBS-5000 Series



CBS-51H-15 Single 1.5 Gallon Coffee Brewer

Brew directly into the 1.5 gallon TPD style LUXUS® Thermal Dispenser, cap, and transport -- Your remote beverage station is ready wherever you need it. Featuring: dual brew basket lock incorporated into the start switch, constant water temperature during 100% of the brew cycle, spray-over volume consistency and a dispense tube system that resists lime build up.

Brewer Dimensions/Empty Weight
W12 D19-1/2 H35-3/4 --55lbs

Shipment Dimensions/Weight
W14 D23 H36 --64lbs

For use with the following dispensers:



D049 L3D-15



D052 L3S-15



D009 TPD-15



D010 LD-15



D014 LS-15

Electrical Configuration	Heater Configuration Code	Voltage	Phase	Wires	Kilowatt	Max Amp	Draw	Batches/HR		
								Cold Water	Hot Water	
C51016	1x1800 KW	120	1	2+G	1.9	15.5		3.0	6.8	
C51026	1x3.0 KW	120/208	1	3+G	2.3	11.3		3.7	8.6	
		120/220			2.6			4.3		10.0
C51036	1x4.0 KW	120/208	1	3+G	3.1	14.9		5.0	11.0	
		120/220			3.4			5.8		11.0
		120/240			4.1			6.6		11.0
C51046	2x3.0 KW	120/208	1	3+G	4.6	22.1		7.4	11.0	
		120/220			5.2			8.6		11.0
		120/240			6.1			9.9		11.0
C51056 ⁽¹⁾	2x4.0 KW	120/208	1	3+G	6.1	29.3		9.9	11.0	
*C51106	1x4.0 KW	220/240	1	2+G	3.5/4.1	15.8/17.2		6.6	11.0	
*C51116	2X3.0 KW	220/240	1	2+G	5.1/6.1	23.4/25.5		9.9	11.0	
*C51126	2X3.0 KW	440	1	2+G	5.1	12		9.9	11.0	
*C51136 ⁽²⁾	2X3.0 KW	220/380	3	4+G	5.1	11.5		9.9	11.0	
Water Inlet (Inch)		Water Pressure		Flow Rate						
3/8 Male Flare		20-75 psig		0.5 gpm						

(1)Rated for 208 VAC Maximum

(2)Requires 3 Phase Upcharge Z056

*Export only

DISPENSERS

- D009 1.5 Gallon LUXUS® Thermal Dispenser (TPD-15)
- D010 1.5 Gallon LUXUS® Thermal Dispenser (LD-15)
- D014 1.5 Gallon LUXUS® Thermal Dispenser (LS-15)
- D049 1.5 Gallon LUXUS® Thermal Dispenser (L3D-15)
- D052 1.5 Gallon LUXUS® Thermal Dispenser (L3S-15)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z006 CBS-51H-15 Maritime Package for TPD-15 Only (Includes
2 x A029, Flanged Legs & Dispense Tube Funnel)
- Z007 CBS-52H-15 Maritime Package for TPD-15 Only (Includes
4 x A029, Flanged Legs & Dispense Tube Funnel)
- Z013 Iced Tea Brew Package (Per Side) (LUXUS® 1.5G
Dispenser, Brew Basket & Controls)
- Z040 Step Down Transformer
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available
- Z056 Three Phase Electrical
- Z058 Water Sensitivity Set For Reverse Osmosis
(100K Ohm)

FILTERS

- F001 15" x 5 1/2" Paper Filters (500 Per Case)(Standard)
- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A006 Half Batch Brew Basket (13" x 5")
- A009 Brewing Stand for LS-15 (BS-1)
- A010 Airpot Brewing Stand 9" (BS-2)
- A011 Single Serving Station for LS-15 (SS-1)
- A012 Twin Serving Station for LS-15 (SS-2)
- A013 Triple Serving Station for LS-15 (SS-3)
- A015 Round Drip Tray
- A029 TPD-15 Maritime Brewer & Server Ring (MSR-15)
- A039 In Line Water Filter with Cartridge
- A069 Identifier Plates, Acrylic
- A075 Replacement Water Filter Cartridge
- A082 Iced Tea Brew Basket (13" x 5")
- A097 Single Serving Station for L3S-15 & L3S-20 (S3S-15/20-1)
- A098 Twin Serving Station for L3S-15 & L3S-20 (S3S-15/20-2)
- A099 Triple Serving Station for L3S-15 & L3S-20 (S3S-15/20-3)
- A113 1.0/1.5 Gallon Hot Tea Infuser
- A129 Quad Serving Station for L3S-15 & L3S-20 (S3S-15/20-4)

Coffee Brewers 5000 Series



CBS-52H-15 Twin 1.5 Gallon Coffee Brewer

Stainless steel, larger sized brew basket is designed for heavier brew ratios. Dual brew basket lock incorporated into the Start switch, constant water temperature during 100% of the brew cycle, spray-over volume consistency and a dispense tube system that resists lime build up. Brew directly into two TPD style LUXUS® Thermal Dispensers to keep beverages hot and fresh for hours.

Brewer Dimensions/Empty Weight
W21 D19-1/2 H35-3/4 --82lbs

Shipment Dimensions/Weight
W23 D23 H36 --100lbs

For use with the following dispensers:



D049 L3D-15



D052 L3S-15



D009 TPD-15



D010 LD-15



D014 LS-15

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR				
							Cold Water	Hot Water			
C52016	2x3.0 KW	120/208	1	3+G	4.6	22.4	7.7	17.2			
		120/220			5.2				8.6	19.2	
		120/240			6.1				25.8	10.2	22.0
C52026	2x4.0 KW	120/208	1	3+G	6.1	29.6	9.9	22.0			
		120/220			6.8				31.3	11.5	22.0
		120/240			8.1				34.1	13.2	22.0
C52036 ⁽¹⁾	3x3.0 KW	120/208	3	4+G	6.9	19.5	11.2	22.0			
		120/220			7.7				20.6	12.9	22.0
		120/240			9.1				22.4	14.9	22.0
C52046 ⁽¹⁾	3x4.0 KW	120/208	3	4+G	9.1	25.8	14.9	22.0			
		120/220			10.3				27.3	17.3	22.0
		120/240			12.1				29.7	19.8	22.0
C52186 ⁽¹⁾	3x4.0 KW	480	3	3+G	12.1	15.2	19.8	22.0			
*C52076 ⁽¹⁾	3X3.0 KW	220/380	3	4+G	7.7	11.9	14.9	22.0			
*C52086 ⁽¹⁾	3X4.0 KW	220/380	3	4+G	10.1	15.3	14.8	22.0			
*C52096	2X3.0 KW	220/240	1	2+G	5.1/6.1	23.7/25.8	10.2	22.0			
*C52106	2X4.0 KW	220/240	1	2+G	6.8/8.1	31.3/34.1	13.2	22.0			
*C52116 ⁽¹⁾	3X3.0 KW	220/240	3	3+G	7.7/9.1	20.6/22.5	14.9	22.0			
*C52126 ⁽¹⁾	3X4.0 KW	220/240	3	3+G	10.2/12.1	27.3/29.7	14.8	22.0			

Water Inlet (Inch) **3/8 Male Flare** Water Pressure **20-75 psig** Flow Rate **1.25 gpm**

(1) Requires 3 Phase Upcharge Z056 *Export only

DISPENSERS

- D009 1.5 Gallon LUXUS® Thermal Dispenser (TPD-15)
- D010 1.5 Gallon LUXUS® Thermal Dispenser (LD-15)
- D014 1.5 Gallon LUXUS® Thermal Dispenser (LS-15)
- D049 1.5 Gallon LUXUS® Thermal Dispenser (L3D-15)
- D052 1.5 Gallon LUXUS® Thermal Dispenser (L3S-15)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z006 CBS-51H-15 Maritime Package for TPD-15 Only (Includes
2 x A029, Flanged Legs & Dispense Tube Funnel)
- Z007 CBS-52H-15 Maritime Package for TPD-15 Only (Includes
4 x A029, Flanged Legs & Dispense Tube Funnel)
- Z013 Iced Tea Brew Package (Per Side) (LUXUS® 1.5G
Dispenser, Brew Basket & Controls)
- Z040 Step Down Transformer
- Z042 Universal Wiring, makes a CBS-52H15 multiphase(single &
three phase)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available
- Z056 Three Phase Electrical

Z058 Water Sensitivity Set For Reverse Osmosis (100K Ohm)

FILTERS

- F001 15" x 5 1/2" Paper Filters (500 Per Case) (Standard)
- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A006 Half Batch Brew Basket (13" x 5")
- A009 Brewing Stand for LS-15 (BS-1)
- A010 Airpot Brewing Stand 9" (BS-2)
- A011 Single Serving Station for LS-15 (SS-1)
- A012 Twin Serving Station for LS-15 (SS-2)
- A013 Triple Serving Station for LS-15 (SS-3)
- A015 Round Drip Tray
- A029 TPD-15 Maritime Brewer & Server Ring (MSR-15)
- A039 In Line Water Filter with Cartridge
- A069 Identifier Plates, Acrylic
- A075 Replacement Water Filter Cartridge
- A082 Iced Tea Brew Basket (13" x 5")
- A097 Single Serving Station for L3S-15 & L3S-20 (S3S-15/20-1)
- A098 Twin Serving Station for L3S-15 & L3S-20 (S3S-15/20-2)
- A099 Triple Serving Station for L3S-15 & L3S-20 (S3S-15/20-3)
- A113 1.0/1.5 Gallon Hot Tea Infuser
- A129 Quad Serving Station for L3S-15 & L3S-20 (S3S-15/20-4)

Coffee Brewers 5000 Series



CBS-52H-20 Twin 2.0 Gallon Coffee Brewer

Brew directly into two 2.0 gallon LUXUS® Thermal Dispensers for high volume beverage needs. The CBS-52H-20 feature dual brew basket locks incorporated into the Start switch, constant water temperature during 100% of the brew cycle, spray-over volume consistency and a dispense tube system that resists lime build up.

Brewer Dimensions/Empty Weight
W21 D19-1/2 H39-3/8 --87lbs

Shipment Dimensions/Weight
W25 D23 H38 --102lbs

For use with the following dispensers:



D050 L3D-20



D053 L3S-20



D011 LD-20



D015 LS-20

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR	
							Cold Water	Hot Water
C53016	2x3.0 KW ^a	120/208	1	3+G	4.6	22.4	5.6	12.9
		120/220			5.2	23.7	6.5	14.9
		120/240			6.1	25.8	7.4	17.2
C53026	2x4.0 KW	120/208	1	3+G	6.1	29.6	7.4	17.2
		120/220			6.8	31.3	8.6	18.0
		120/240			8.1	34.1	9.9	18.0
C53036 ⁽¹⁾	3x3.0 KW	120/208	3	4+G	6.9	19.5	8.4	18.0
		120/220			7.7	20.6	9.7	18.0
		120/240			9.1	22.4	11.2	18.0
C53046 ⁽¹⁾	3x4.0 KW	120/208	3	4+G	9.1	25.8	11.2	18.0
		120/220			10.3	27.3	12.9	18.0
		120/240			12.1	29.7	14.9	18.0
C53186 ⁽¹⁾	3x4.0 KW	480	3	3+G	12.1	15.2	14.9	18.0
*C53076 ⁽¹⁾	3X3.0 KW	220/380	3	4+G	7.7	11.9	11.2	18.0
*C53086 ⁽¹⁾	3X4.0 KW	220/380	3	4+G	10.1	15.3	14.9	18.0
*C53096	2X3.0 KW	220/240	1	2+G	5.1/6.1	23.7/25.8	7.4	18.0
*C53106	2X4.0 KW	220/240	1	2+G	6.8/8.1	31.3/34.1	9.9	18.0
*C53116 ⁽¹⁾	3X3.0 KW	220/240	3	3+G	7.7/9.1	20.6/22.5	11.2	18.0
*C53126 ⁽¹⁾	3X4.0 KW	220/240	3	3+G	10.2/12.1	27.3/29.7	14.9	18.0

Water Inlet (Inch)	Water Pressure	Flow Rate
3/8 Male Flare	20-75 psig	1.25 gpm

(1) Requires 3 Phase Upcharge Z056

*Export only

DISPENSERS

- D011 2.0 Gallon LUXUS® Thermal Dispenser (LD-20)
- D015 2.0 Gallon LUXUS® Thermal Dispenser (LS-20)
- D050 2.0 Gallon LUXUS® Thermal Dispenser(L3D-20)
- D053 2.0 Gallon LUXUS® Thermal Dispenser (L3S-20)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z028 Iced Tea Brew Package
(Dispenser, Brew Basket & Controls)(per Side)
- Z031 Two Portion Option
- Z040 Step Down Transformer
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available
- Z056 Three Phase Electrical
- Z058 Water Sensitivity Set For Reverse Osmosis (100K Ohm)

FILTERS

- F001 15" x 5 1/2" Paper Filters (500 Per Case) (Standard)
- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A006 Half Batch Brew Basket (13" x 5")
- A009 Brewing Stand for LS-20 (BS-1)
- A010 Airpot Brewing Stand 9" (BS-2)
- A011 Single Serving Station for LS-20 (SS-1)
- A012 Twin Serving Station for LS-20 (SS-2)
- A013 Triple Serving Station for LS-20 (SS-3)
- A015 Round Drip Tray
- A039 In Line Water Filter with Cartridge
- A069 Identifier Plates, Acrylic
- A075 Replacement Water Filter Cartridge
- A082 Iced Tea Brew Basket (13" x 5")
- A097 Single Serving Station for L3S-15 & L3S-20 (S3S-15/20-1)
- A098 Twin Serving Station for L3S-15 & L3S-20 (S3S-15/20-2)
- A099 Triple Serving Station for L3S-15 & L3S-20 (S3S-15/20-3)
- A129 Quad Serving Station for L3S-15 & L3S-20 (S3S-15/20-4)

Coffee Brewers 6000 Series

Reliable, durable performance day after day. FETCO® designs each brewer to deliver hot, fresh aromatic coffee that tastes as good from the first cup to the last.

CBS-6000 Series



CBS-61H Single 3.0 Gallon Coffee Brewer

High volume hot beverage service at your fingertips. Completely mobile solution for high volume demand, the CBS-61H allows you to brew directly into the 3.0 gallon LUXUS® Thermal Dispenser without the need for an additional heat source. This brewer holds a consistent water temperature during 100% of the brewing cycle, maintains spray over volume consistency and resists lime build-up on the inside dispense system for the perfect cup of coffee every time.

Brewer Dimensions/Empty Weight
W21-3/8 D22-3/8 H40 --111lbs

Shipment Dimensions/Weight
W23 D24 H38 --115lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR	
							Cold Water	Hot Water
C61016	2x3.0 KW	120/208	1	3+G	4.6	22.1	3.7	8.6
		120/220			5.2	23.4	4.3	9.0
		120/240			6.1	25.5	5.0	9.0
C61026	2x4.0 KW	120/208	1	3+G	6.1	29.3	5.0	9.0
		120/220			6.8	31.0	5.8	9.0
		120/240			8.1	33.8	6.6	9.0
C61036 ⁽¹⁾	3x3.0 KW	120/208	3	4+G	6.9	19.5	5.6	9.0
		120/220			7.7	20.6	6.5	9.0
		120/240			9.1	22.4	7.4	9.0
C61046 ⁽¹⁾	3x4.0 KW	120/208	3	4+G	9.1	25.8	7.4	9.0
		120/220			10.3	27.3	8.6	9.0
		120/240			12.1	29.7	9.0	9.0
C61146 ⁽¹⁾	3x4.0 KW	480	3	3+G	12.1	14.9	9.0	9.0
*C61076 ⁽¹⁾	3X3.0 KW	220/380	3	4+G	7.6	12	7.4	9.0
*C61086 ⁽¹⁾	3X4.0 KW	220/380	3	4+G	10.1	15.3	9.0	9.0
*C61126 ⁽¹⁾	3X3.0 KW	240/415	3	3+G	9.1	12.9	7.4	9.0
*C61136 ⁽¹⁾	3X4.0 KW	240/415	3	3+G	12.1	17.5	9.0	9.0

*Export only

Water Inlet (Inch)	Water Pressure	Flow Rate
3/8 Male Flare	20-75 psig	1.5 gpm

(1) Requires 3 Phase Upcharge (Z056)

DISPENSERS

D012 3.0 Gallon LUXUS® Thermal Dispenser (TPD-30)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z014 CBS-61H Maritime Package for TPD-30 Only (Includes
2 x A031, Flanged Legs & Dispense Tube Funnel)
- Z017 CBS-62H Maritime Package for TPD-30 Only (Includes
4 x A031, Flanged Legs & Dispense Tube Funnel)
- Z026 Two Portion Option Single for CBS-61H
- Z031 Two Portion Option Dual for CBS-62H
- Z040 Step Down Transformer
- Z043 CBS-61H or CBS-62H Universal Wiring
(Field Convertible from 1 to 3 Phase)
- Z055 Export Voltages Available

- Z056 Three Phase Electrical
- Z058 Water Sensitivity Set For Reverse Osmosis
(100K Ohm)

FILTERS

- F004 20" x 8" Paper Filters (500 Per Case) (Standard)
- F005 18" x 7" Paper Filters (500 Per Case)

ACCESSORIES

- A015 Round Drip Tray
- A016 Half Batch Brew Basket (18" x 7")
- A031 Maritime Brewer & Server Ring (MSR-30)
- A039 In Line Water Filter with Cartridge
- A069 Identifier Plates, Acrylic
- A075 Replacement Water Filter Cartridge
- A086 Ring Plastic Base for TPD-30

For use with the following dispensers:



D012 TPD-30

Coffee Brewers 6000 Series

CBS-6000 Series



CBS-62H Twin 3.0 Gallon Coffee Brewer

Perfect for banquet, catered events and stadium use, the CBS-62H is completely portable so large volumes of hot, fresh beverages can easily be transported to wherever you need them. The CBS-62H brewer holds a consistent water temperature during 100% of the brewing cycle, maintains spray over volume consistency and resists lime build-up on the inside dispense system.

Brewer Dimensions/Empty Weight
W35-1/2 D22-3/8 H40 --195lbs

Shipment Dimensions/Weight
W37 D24 H38 --197lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR	
							Cold Water	Hot Water
C62016	3x3.0 KW	120/208	1	3+G	6.9	33.3	5.6	12.9
		120/220			7.7	35.2	6.5	14.9
		120/240			9.1	38.3	7.4	17.2
C62026	3x4.0 KW	120/208	1	3+G	9.1	44.1	7.4	17.2
		120/220			10.3	46.6	8.6	18.0
		120/240			12.1	50.8	9.9	18.0
C62036 ⁽¹⁾	3x3.0 KW	120/208	3	4+G	6.9	19.5	5.6	12.9
		120/220			7.7	20.6	6.5	14.9
		120/240			9.1	22.4	7.4	17.2
C62046 ⁽¹⁾	3x4.0 KW	120/208	3	4+G	9.1	25.8	7.4	17.2
		120/220			10.3	27.3	8.6	18.0
		120/240			12.1	29.7	9.9	18.0
C62056 ⁽¹⁾	6x3.0 KW	120/208	3	4+G	13.6	38.3	11.2	18.0
		120/220			15.3	40.5	12.9	18.0
		120/240			18.1	44.1	14.9	18.0
C62066 ⁽¹⁾	6x4.0 KW	120/208	3	4+G	18.1	50.8	14.9	18.0
		120/220			20.4	53.7	17.3	18.0
		120/240			24.1	58.5	18.0	18.0
C62146 ⁽¹⁾	6x3.0 KW	480	3	3+G	18.1	22.5	14.9	18.0
C62166 ⁽¹⁾	6x4.0 KW	480	3	3+G	24.1	29.7	18.0	18.0
*C62106 ⁽¹⁾	6X3.0 KW	220/380	3	4+G	15.2	23.4	14.9	18.0
*C62136 ⁽¹⁾	6X4.0 KW	220/380	3	4+G	20.3	31.3	18.0	18.0
*C62176 ⁽¹⁾	6X3.0 KW	240/415	3	4+G	18.1	25.5	14.9	18.0

*Export only

Water Inlet (Inch) **3/8 Male Flare** Water Pressure **20-75 psig** Flow Rate **2.0 gpm**

(1) Requires three phase upcharge (Z056)

For use with the following dispensers:



D012 TPD-30

See opposite page 22 for Dispensers, Options, Filters and Accessories

IP44 Maritime Series Coffee Brewers

CBS-52H-15 Twin 1.5 Gallon Coffee Brewer



FETCO® Maritime Series Equipment is specially designed for maritime use. IP44 certified compliant coffee brewing equipment is perfect for front-of-the-house and back-of-the-house applications on cruise ships.

Brewer Dimensions/Empty Weight
W21 D19-1/2 H35-3/4 --82lbs

Shipment Dimensions/Weight
W23 D23 H36 --100lbs



Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR	
							Cold Water	Hot Water
C52196MIP ⁽¹⁾	3x4.0 KW	480	3	3+G	12.1	15.2	19.8	22.0

Water Inlet (Inch)	Water Pressure	Flow Rate
3/8 Male Flare	20-75 psig	1.25 gpm

(1) Requires 3 Phase Upcharge Z056

For use with the following dispensers:



D052 L3S-15



D049 L3D-15



D009 TPD-15



D014 LS-15



D010 LD-15

DISPENSERS

- D009 1.5 Gallon LUXUS® Thermal Dispenser (TPD-15)
- D010 1.5 Gallon LUXUS® Thermal Dispenser (LD-15)
- D014 1.5 Gallon LUXUS® Thermal Dispenser (LS-15)
- D049 1.5 Gallon LUXUS® Thermal Dispenser (L3D-15)
- D052 1.5 Gallon LUXUS® Thermal Dispenser (L3S-15)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z006 CBS-51H-15 Maritime Package for TPD-15 Only (Includes
2 x A029, Flanged Legs & Dispense Tube Funnel)
- Z007 CBS-52H-15 Maritime Package for TPD-15 Only (Includes
4 x A029, Flanged Legs & Dispense Tube Funnel)
- Z013 Iced Tea Brew Package (Per Side) (LUXUS® 1.5G
Dispenser, Brew Basket & Controls)
- Z040 Step Down Transformer
- Z042 Universal Wiring, makes a CBS-52H15 multiphase(single &
three phase)
- Z047 Red Handle On Brew Basket
- Z048 Green Handle On Brew Basket
- Z049 Orange Handle On Brew Basket
- Z055 Export Voltages Available
- Z056 Three Phase Electrical

- Z058 Water Sensitivity Set For Reverse Osmosis (100K Ohm)

FILTERS

- F001 15" x 5 1/2" Paper Filters (500 Per Case) (Standard)
- F002 13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

- A006 Half Batch Brew Basket (13" x 5")
- A009 Brewing Stand for LS-15 (BS-1)
- A010 Airpot Brewing Stand 9" (BS-2)
- A011 Single Serving Station for LS-15 (SS-1)
- A012 Twin Serving Station for LS-15 (SS-2)
- A013 Triple Serving Station for LS-15 (SS-3)
- A015 Round Drip Tray
- A029 TPD-15 Maritime Brewer & Server Ring (MSR-15)
- A039 In Line Water Filter with Cartridge
- A069 Identifier Plates, Acrylic
- A075 Replacement Water Filter Cartridge
- A082 Iced Tea Brew Basket (13" x 5")
- A097 Single Serving Station for L3S-15 & L3S-20 (S3S-15/20-1)
- A098 Twin Serving Station for L3S-15 & L3S-20 (S3S-15/20-2)
- A099 Triple Serving Station for L3S-15 & L3S-20 (S3S-15/20-3)
- A113 1.0/1.5 Gallon Hot Tea Infuser
- A129 Quad Serving Station for L3S-15 & L3S-20 (S3S-15/20-4)

IP44 Maritime Series Coffee Brewers



CBS-52H-20 Twin 2.0 Gallon Coffee Brewer

FETCO® Maritime Series Equipment is specially designed for maritime use. IP44 certified compliant coffee brewing equipment is perfect for front-of-the-house and back-of-the-house applications on cruise ships.

Brewer Dimensions/Empty Weight
W21 D19-1/2 H39-3/8 --87lbs

Shipment Dimensions/Weight
W25 D23 H38 --102lbs



Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR	
							Cold Water	Hot Water
C53206MIP ⁽¹⁾	3x4.0 KW ^a	380	3	3+G	7.5	11.9	9.3	12.9
		400	3	3+G	8.3	12.5	10.3	14.9
C53216MIP	2x3.0 KW	240	1	2+G	6.1	25.8	7.4	17.2
C53226MIP ⁽¹⁾	3x4.0 KW	440	3	3+G	10.1	13.7	12.9	18.0
		480	3	3+G	12.1	14.9	14.9	18.0

Water Inlet (Inch)	Water Pressure	Flow Rate
3/8 Male Flare	20-75 psig	1.25 gpm

(1) Requires 3 Phase Upcharge Z056

For use with the following dispensers:



D053 L3S-20



D050 L3D-20



D015 LS-20



D011 LD-20

DISPENSERS

D011	2.0 Gallon LUXUS® Thermal Dispenser (LD-20)	\$526
D015	2.0 Gallon LUXUS® Thermal Dispenser (LS-20)	\$488
D050	2.0 Gallon LUXUS® Thermal Dispenser(L3D-20)	\$548
D053	2.0 Gallon LUXUS® Thermal Dispenser (L3S-20)	\$510

OPTIONS

Z005	Color Coded Dispenser Faucet Handles Orange, Red, Blue, Green (Standard Black)	\$0
Z028	Iced Tea Brew Package (Dispenser, Brew Basket & Controls)(per Side)	\$886
Z031	Two Portion Option	\$226
Z040	Step Down Transformer	\$264
Z047	Red Handle On Brew Basket	\$0
Z048	Green Handle On Brew Basket	\$0
Z049	Orange Handle On Brew Basket	\$0
Z055	Export Voltages Available	Call
Z056	Three Phase Electrical	\$250
Z058	Water Sensitivity Set For Reverse Osmosis (100K Ohm)	\$0

FILTERS

F001	15" x 5 1/2" Paper Filters (500 Per Case) (Standard)
F002	13" x 5" Paper Filters (500 Per Case)

ACCESSORIES

A006	Half Batch Brew Basket (13" x 5")
A009	Brewing Stand for LS-20 (BS-1)
A010	Airpot Brewing Stand 9" (BS-2)
A011	Single Serving Station for LS-20 (SS-1)
A012	Twin Serving Station for LS-20 (SS-2)
A013	Triple Serving Station for LS-20 (SS-3)
A015	Round Drip Tray
A039	In Line Water Filter with Cartridge
A069	Identifier Plates, Acrylic
A075	Replacement Water Filter Cartridge
A082	Iced Tea Brew Basket (13" x 5")
A097	Single Serving Station for L3S-15 & L3S-20 (S3S-15/20-1)
A098	Twin Serving Station for L3S-15 & L3S-20 (S3S-15/20-2)
A099	Triple Serving Station for L3S-15 & L3S-20 (S3S-15/20-3)
A129	Quad Serving Station for L3S-15 & L3S-20 (S3S-15/20-4)

IP44 Maritime Series Coffee Brewers

CBS-6000 Maritime IP44 Series



CBS-62H Twin 3.0 Gallon Coffee Brewer

FETCO's 6000 Series IP44 brewers feature a brew basket lock incorporated into the start switch, constant water temperature during 100% of the brew cycle, spray-over volume consistency and a dispense tube system that resists lime build up.

Brewer Dimensions/Empty Weight
W35-1/2 D22-3/8 H40 --195lbs

Shipment Dimensions/Weight
W37 D24 H38 --197lbs



Electrical Configuration	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR	
							Cold Water	Hot Water
C62186MIP(1)	6x4.0 KW	440/480	3	3+G	20.1	27.4	17.3	18.0
		440/480			24.1	29.7	18.0	18.0
C62196MIP(1)	3x4.0 KW	440/480	3	3+G	10.1	13.7	8.6	18.0
		440/480			12.1	14.9	9.9	18.0

Water Inlet (Inch)	Water Pressure	Flow Rate
3/8 Male Flare	20-75 psig	2.0 gpm

(1) Requires three phase upcharge (Z056)

For use with the following dispensers:



D012 TPD-30

DISPENSERS

D012 3.0 Gallon LUXUS® Thermal Dispenser (TPD-30)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z014 CBS-61H Maritime Package for TPD-30 Only (Includes
2 x A031, Flanged Legs & Dispense Tube Funnel)
- Z017 CBS-62H Maritime Package for TPD-30 Only (Includes
4 x A031, Flanged Legs & Dispense Tube Funnel)
- Z026 Two Portion Option Single for CBS-61H
- Z031 Two Portion Option Dual for CBS-62H
- Z040 Step Down Transformer
- Z043 CBS-61H or CBS-62H Universal Wiring
(Field Convertible from 1 to 3 Phase)
- Z055 Export Voltages Available

Z056 Three Phase Electrical

Z058 Water Sensitivity Set For Reverse Osmosis
(100K Ohm)

FILTERS

- F004 20" x 8" Paper Filters (500 Per Case) (Standard)
- F005 18" x 7" Paper Filters (500 Per Case)

ACCESSORIES

- A015 Round Drip Tray
- A016 Half Batch Brew Basket (18" x 7")
- A031 Maritime Brewer & Server Ring (MSR-30)
- A039 In Line Water Filter with Cartridge
- A069 Identifier Plates, Acrylic
- A075 Replacement Water Filter Cartridge
- A086 Ring Plastic Base for TPD-30

IP44 Maritime Series Hot Water Dispensers



HWB-5 5 Gallon Hot Water Dispenser

Durable, stainless steel construction, zero recovery time and IP44 rating make these 5 gallon Hot Water Dispensers ideal for cruise ships.

Boiler Dimensions/Empty Weight
W10-1/8 D23-5/8 H29-5/8 --58lbs

Shipment Dimensions/Weight
W12 D27 H32 --65lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Gallons / Per Hour	
							Cold	Hot Water
H050413M4	1x3.0 KW	220/240	1	2+G	2.5-3.0	11.8-12.8	5.6	12.9

Water Inlet (Inch)	Water Pressure	Flow Rate
3/8 Male Flare	20-75 psig	1.5 gpm

OPTIONS

- Z022 Double Sided Service
- Z056 Three Phase Electrical
- Z057 Aerator Faucet

ACCESSORIES

- A015 Round Drip Tray
- A039 In Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge



HWB-10 10 Gallon Hot Water Dispenser

Fully insulated side and top, electronic components, controlled refill, guard protected gauge and faucet for added safety. These IP44 certified Hot Water Dispensers have flanged legs that bolt to countertops -- perfect for cruise ships..

Boiler Dimensions/Empty Weight
W16-1/8 D23-5/8 H29-5/8 --64lbs

Shipment Dimensions/Weight
W21 D25 H32 --72lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Gallons / Per Hour	
							Cold	Hot Water
H100313M4	2x3.0 KW	220-240	3	3+G	5.0-6.0	11.8-12.8	11.2	25.8

Water Inlet (Inch)	Water Pressure	Flow Rate
3/8 Male Flare	20-75 psig	1.5 gpm

Coffee Brewers 7000 Series

Mobile Coffee Service or Stationary Serving Station – You Decide

Select from our On-The-Go mobile LUXUS® Thermal Dispensers or stationary counters. It's up to you – if transporting large volumes of hot or cold beverages is what you need, our On-The-Go LUXUS® Thermal easy-glide dispensers with push-to-brake casters are effortless to maneuver. If you prefer an immobile standing station, our durable stainless steel counters hold both the brewer and dispenser saving valuable space. Select the equipment that is right for you.

CBS-7000 Series High Volume Coffee Brewers



Shown with LBD-6C Dispenser
DISPENSER SOLD SEPARATELY

CBS-71AC Single 6.0 Gallon Coffee Brewer

Single brewer and 1 On-The-Go mobile LUXUS® dispenser. FETCO® is committed to designing equipment that is operator-friendly to increase safety, minimize training and increase productivity. Case and point, our Series 7000 large capacity brew basket drawer easily slides out so that the brew basket can be safely lifted in and out.

Brewer Dimensions/Empty Weight
W18-1/2 D35 H79 --261lbs

Shipment Dimensions/Weight
W48 D42 H54 --313lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR	
							Cold Water	Hot Water
C71018	3x5 KW	120/208	3	4+G	11.5	33.0	3.0	5.0
		120/220			13.3	36.0	3.3	5.0
		120/240			15.2	37.9	3.6	5.0
C71028	3x10 KW	120/208	3	4+G	22.7	64.3	4.5	5.0
		120/220			26.3	70.3	4.8	5.0
		120/240			30.2	74.0	5.0	5.0
C71038	3x10 KW	480	3	3+G(1)	30.2	37.9	5.0	5.0
*C71058	3X5 KW	220/240	3	4+G	12.9	33.9	3.6	5.0
*C71068	3X10 KW	240/415	3	4+G	25.6	67.3	5.0	5.0
*Export only								
Water Inlet (Inch)		Water Pressure			Flow Rate			
3/8 Male Flare		20-75 psig			3.0 gpm			

(1) Plus 120V cord and plug

DISPENSERS

- D020 6.0 Gallon Mobile LUXUS® Thermal Dispenser(LBD-6C)
- D021 18.0 Gallon Mobile LUXUS® Thermal Dispenser (LBD-18)
- D022 24.0 Gallon Mobile LUXUS® Thermal Dispenser (LBD-24)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z055 Export Voltages Available

FILTERS

- F006 23" x 9" Paper Filters (500 Per Case)

ACCESSORIES

- A037 Gravity Jug Fill Hose for LBD-6C & LBD-18
- A069 Identifier Plates, Acrylic
- A078 Gravity Jug Fill Hose for LBD-24

Coffee Brewers 7000 Series

CBS-7000 Series High Volume Coffee Brewers

CBS-72AC Twin 6.0 Gallon Coffee Brewer

Double brewer and 2 On-The-Go mobile LUXUS® dispensers. No more filling containers and then carrying heavy dispensers to another location. Simply brew directly into our On-The-Go Mobile LUXUS® Thermal Dispensers that can be easily wheeled to wherever hot or cold fresh beverages are needed.

Brewer Dimensions/Empty Weight
W36 D35 H79 --564lbs

Shipment Dimensions/Weight
W48 D42 H54 --669lbs



Shown with LBD-6C Dispenser
DISPENSER SOLD SEPARATELY

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR		
							Cold Water	Hot Water	
C72018 ⁽¹⁾	3X5 KW ⁽³⁾	120/208	3	4+G	11.6	33.7	4.7	10.0	
		120/220			13.4	36.7	5.4	10.0	
		120/240			15.3	38.6	6.2	10.0	
C72028 ⁽²⁾	3X5 KW ⁽³⁾	120/208	3	4+G	22.8	65.0	6.0	10.0	
		120/220			26.4	71.0	6.6	10.0	
		120/240			30.3	74.7	7.2	10.0	
C72038 ⁽¹⁾	3X10KW ⁽³⁾	120/208	3	4+G	22.8	65.0	9.3	10.0	
		120/220			26.4	71.0	10.0	10.0	
		120/240			30.3	74.7	10.0	10.0	
C72048 ⁽¹⁾	3X10 KW ⁽³⁾	480	3	3+G ⁽⁴⁾	30.3	37.9	10.0	10.0	
C72058 ⁽²⁾	3x10 KW ⁽³⁾	480	3	3+G ⁽⁴⁾	60.3	74.7	10.0	10.0	
*C72108	3X5 KW	220/240	3	4+G	12.9	33.9	7.2	10.0	
*C72118	3X10 KW	240/415	3	4+G	25.6	67.3	10.0	10.0	
Water Inlet (Inch)		Water Pressure		Flow Rate					
3/8 Male Flare		20-75 psig		3.0 gpm					

(1) With power management (3) On each side
(2) Without power management (4) Plus 120V cord and plug

DISPENSERS

- D020 6.0 Gallon Mobile LUXUS® Thermal Dispenser(LBD-6C)
- D021 18.0 Gallon Mobile LUXUS® Thermal Dispenser (LBD-18)
- D022 24.0 Gallon Mobile LUXUS® Thermal Dispenser (LBD-24)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z055 Export Voltages Available

FILTERS

- F006 23" x 9" Paper Filters (500 Per Case)

ACCESSORIES

- A037 Gravity Jug Fill Hose for LBD-6C & LBD-18
- A069 Identifier Plates, Acrylic
- A078 Gravity Jug Fill Hose for LBD-24

Coffee Brewers 7000 Series

CBS-7000 Series High Volume Coffee Brewers



Shown with CTR-71

COUNTER SOLD SEPARATELY

Shown with LBD-6

DISPENSERS SOLD SEPARATELY

CBS-71A Single 6.0 Gallon Coffee Brewer

Single brewer and 1 LUXUS® dispenser on a stationary counter. The large spray pan provides full and even saturation of the coffee bed along with the adjustable contact time and bypass features to extract the perfect cup of coffee, or more likely the perfect 1,000 cups of coffee, with a push of a button.

Brewer Dimensions/Empty Weight
W11 D18-1/4 H26 --239lbs

Shipment Dimensions/Weight
W48 D42 H54 --313lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR	
							Cold Water	Hot Water
C71017	3x5 KW	120/208	3	4+G	11.5	33.0	3.0	5.0
		120/220			13.3	36.0	3.3	5.0
		120/240			15.2	37.9	3.6	5.0
C71027	3x10 KW	120/208	3	4+G	22.7	64.3	4.5	5.0
		120/220			26.3	70.3	4.8	5.0
		120/240			30.2	74.0	5.0	5.0
C71037	3x10 KW	480	3	3+G(1)	30.2	37.9	5.0	5.0
*C71057	3X5 KW	220/380	3	4+G	12.9	33.9	3.6	5.0
*C71067	3X10 KW	220/380	3	4+G	25.6	67.3	5.0	5.0
*Export only								
Water Inlet (Inch)		Water Pressure		Flow Rate				
3/8 Male Flare		20-75 psig		3.0 gpm				

(1) Plus 120V cord and plug

DISPENSERS

D019 6.0 Gallon LUXUS® Thermal Dispenser (LBD-6)

OPTIONS

Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
Z055 Export Voltages Available

FILTERS

F006 23" x 9" Paper Filters (500 Per Case)

ACCESSORIES

A018 Serving Station for LBD-6 with Drip Tray
A019 Counter for CBS-71A (CTR-71)
A020 Counter for CBS-72A (CTR-72)
A069 Identifier Plates, Acrylic

Coffee Brewers 7000 Series

CBS-7000 Series High Volume Coffee Brewers



CBS-72A Twin 6.0 Gallon Coffee Brewer

Double brewer and 2 LUXUS® dispensers on a stationary counter. Hassle-free cleaning encourages staff to keep the equipment maintained by featuring full access lids with positive lock slides, quick turn handles and seamless, full drain liners.

Brewer Dimensions/Empty Weight
W36-1/2 D35 H48 1/2 --420lbs

Shipment Dimensions/Weight
W48 D42 H54 --659lbs

Shown with CTR-72
COUNTER SOLD SEPARATELY

Shown with LBD-6
DISPENSERS SOLD SEPARATELY

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR	
							Cold Water	Hot Water
C72017 ⁽¹⁾	3x5 KW ⁽³⁾	120/208	3	4+G	11.6	33.7	4.7	10.0
<i>with PIM</i>		120/220			13.4	36.7	5.4	10.0
		120/240			15.3	38.6	6.2	10.0
C72027 ⁽²⁾	3x5 KW ⁽³⁾	120/208	3	4+G	22.8	65.0	6.0	10.0
<i>without PIM</i>		120/220			26.4	71.0	6.6	10.0
		120/240			30.3	74.7	7.2	10.0
C72037 ⁽¹⁾	3x10KW ⁽³⁾	120/208	3	4+G	22.8	65.0	9.3	10.0
<i>with PIM</i>		120/220			26.4	71.0	10.0	10.0
		120/240			30.3	74.7	10.0	10.0
C72047 ⁽¹⁾	3x10 KW ⁽³⁾	480	3	3+G ⁽⁴⁾	30.3	37.9	10.0	10.0
C72057 ⁽²⁾	3x10 KW ⁽³⁾	480	3	3+G ⁽⁴⁾	60.3	74.7	10.0	10.0
*C72107	3x5 KW ⁽³⁾	220/240	3	4+G	12.9	33.0	7.2	10.0
*C72117	3X10 KW ⁽³⁾	240/415	3	4+G	25.6	67.3	10.0	10.0
				<i>*Export only</i>				
Water Inlet (Inch)		Water Pressure		Flow Rate				
3/8 Male Flare		20-75 psig		3.0 gpm				

(1) With Power Management

(3) On Each Side

(2) Without Power Management

(4) Plus 120V Cord & Plug

DISPENSERS

D019 6.0 Gallon LUXUS® Thermal Dispenser (LBD-6)

OPTIONS

Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)

Z055 Export Voltages Available

FILTERS

F006 23" x 9" Paper Filters (500 Per Case)

ACCESSORIES

A018 Serving Station for LBD-6 with Drip Tray

A019 Counter for CBS-71A (CTR-71)

A020 Counter for CBS-72A (CTR-72)

A069 Identifier Plates, Acrylic

Tea Brewers 7000 Series

CBS 7000 Series High Volume Tea Brewer




TBS-71AC Single 6.0 Gallon & 18 Gallon Tea Brewer

Single brewer and 1 On-The-Go mobile LUXUS® dispenser. FETCO® is committed to designing equipment that is operator-friendly to increase safety, minimize training and increase productivity. Case and point, our Series 7000 large capacity brew basket drawer easily slides out so that the brew basket can be safely lifted in and out.

Brewer Dimensions/Empty Weight
W18-1/2 D35 H79 --261lbs

Shipment Dimensions/Weight
W48 D42 H54 --313lbs

Shown with LBD-6C
DISPENSERS SOLD SEPARATELY \$3342

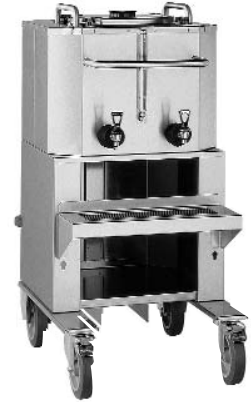

SHOWN WITH LBD-18
DISPENSERS SOLD SEPARATELY \$6212

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Batches/HR	
							Cold Water	Hot Water
T71018	3x5 KW	120/208	3	4+G	11.5	33.0	2.3	2.6
		120/220			13.3	36.0	2.4	2.7
		120/240			15.2	37.9	2.6	2.8
T71028	3x10 KW	120/208	3	4+G	22.7	64.3	3.0	3.2
		120/220			26.3	70.3	3.1	3.3
		120/240			30.2	74.0	3.2	3.4
T71038	3x10 KW	480	3	3+G ⁽¹⁾	30.2	37.9	3.2	3.4
Water Inlet (Inch) 3/8 Male Flare		Water Pressure 20-75 psig		Flow Rate 3.0 gpm				

(1) Plus 120V Cord & Plug

DISPENSERS

- D020 6.0 Gallon Mobile LUXUS® Thermal Dispenser (LBD-6C)
- D028 18.0 Gallon Iced Tea Mobile LUXUS® Thermal Dispenser (LBD-18)
- D031 3.0 Gallon Iced Tea Dispenser (ITD-30)
- D031 3.0 Gallon Iced Coffee Dispenser (ITD-30)
- D049 1.5 Gallon LUXUS® Thermal Dispenser (L3D-15)

OPTIONS

- Z005 Color Coded Dispenser Faucet Handles
Orange, Red, Blue, Green (Standard Black)
- Z055 Export Voltages Available

FILTERS

- F006 23" x 9" Paper Filters (500 Per Case)

ACCESSORIES

- A037 Gravity Jug Fill Hose for LBD-6C & LBD-18
- A069 Identifier Plates, Acrylic

GRINDERS

Single and dual hopper portion control coffee grinders with unmatched grind consistency, durability and accuracy let the aroma and flavor of each coffee bean remain intact for precise recipes every time. Powerful 0.67 Hp motor along with precision slice grinding discs provide uniform grind profiles. Easily removable 5 lbs. hoppers on the dual grinders allow operators to change the coffee bean selection easily. 2 or 3 batch settings per hopper.



GR-1.2 Single Hopper Portion Control Coffee Grinder

The GR-1.2 grinder features a user-friendly interface with 15 lbs. single hopper capacity that grinds directly into the brew basket for quick, easy and consistent grind profiles every time.

Grinder Dimensions/Empty Weight
W9-1/4 D15-1/2 H28-1/2 --50lbs

Shipment Dimensions/Weight
W12 D19 H33 --56lbs



GR-1.3 Single Hopper Portion Control Coffee Grinder

The GR-1.3 grinder's superior grinding consistency can be attributed to the vertically built-in slicing type grinding discs that ensure precision.

Grinder Dimensions/Empty Weight
W9-1/4 D15-1/2 H28-1/2 --50lbs

Shipment Dimensions/Weight
W12 D19 H33 --56lbs

Electrical	Voltage	Motor Power	Phase	Wires	Kilowatt	Max Amp Draw	Hopper Capacity	Grind Rate (Medium)
G01012	120	0.67Hp	1	2+G	0.5	5.7	15 lbs	18oz./min
G01013	120	0.67Hp	1	2+G	0.5	5.7	15 lbs	18oz./min
*G01022	220/240	0.67Hp	1	2+G	.7/1.8	5.7/6.3	15 lbs.	18 oz./min
*G01023	220/240	0.67Hp	1	2+G	.7/1.8	5.2/6.3	15 lbs.	18 oz./min

Shown with A088, Sold Separately.

OPTIONS

Z055 Export Voltages Available

ACCESSORIES

A088 16" x 6" Brew Basket Scoop



GRF-2.2 Dual Removable Hopper Portion Control Coffee Grinder

The GR-2.2's front access dual hoppers are easy to remove making changing coffee selection a breeze. No more spilling!

Grinder Dimensions/Empty Weight
W9-1/4 D15-1/2 H28-1/2 --50lbs

Shipment Dimensions/Weight
W12 D19 H33 --72lbs



GRF-2.3 Dual Removable Hopper Portion Control Coffee Grinder

The GR-2.3 three portion settings, brew basket scoop for larger baskets and additional hoppers with lids make this the perfect choice for high volume.

Grinder Dimensions/Empty Weight
W9-1/4 D15-1/2 H28-1/2 --50lbs

Shipment Dimensions/Weight
W12 D19 H33 --72lbs

Electrical Config Code	Voltage	Motor Power	Phase	Wires	Kilowatt	Max Amp Draw	Hopper Capacity	Grind Rate Medium
G02012	120	0.67Hp	1	2+G	0.5	5.7	2x5 lbs	18oz./min
G02013	120	0.67Hp	1	2+G	0.5	5.7	2x5 lbs	18oz./min
*G02022	220/240	0.67Hp	1	2+G	.7/1.8	5.7/6.3	2x5 lbs	18oz/min
*G02023	220/240	0.67Hp	1	2+G	.7/1.8	5.7/6.3	2x5 lbs	18oz/min

Shown with A066, Sold Separately.

OPTIONS

Z055 Export Voltages Available

ACCESSORIES

A066 5 Pound Removable Hopper with Lid
A088 16" x 6" Brew Basket Scoop
A118 Hopper Shelf

HWB SERIES *Hot Water Dispensers*

Special needs? These fully insulated hot water dispensers are ready to deliver hot, steaming water when you need it for: French presses, teas, soups, gravies, sauces, pastas, potatoes and more. High volume dispensers have electronic components, controlled refill, guard protected faucet for added safety, durable, heavy gauge stainless steel body construction and consistent water volume that you can rely on for a fast, convenient solution.

HWB-2 Compact 2 Gallon Hot Water Dispenser

Our new 2 gallon hot water dispenser is the perfect size for smaller operations.

Call for availability



Boiler Dimensions/Empty Weight
W9-1/4 D15-1/2 H28-1/2 --50lbs

Shipment Dimensions/Weight
W13 D20H26 --21lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Gallons/Hr Cold
*H02011 <i>*Export only</i>	1x2.1KW	120	1	2+G	3.24	18.0	4
Water Inlet (Inch)		Water Pressure		Flow Rate			
3/8 Male Flare		20-75 psig		0.63 gpm			

Specification subject to change

HWB-5 5 Gallon Hot Water Dispenser

Fully insulated side and top for operator safety.



Boiler Dimensions/Empty Weight
W10-1/8 D23-5/8 H29-5/8 --58lbs

Shipment Dimensions/Weight
W12 D27 H32 --65lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Gallons / Per Hour Cold	Hot Water
H05011	1x3.0 KW	120/208	1	3+G	2.4	11.3	5.6	12.9
		120/220			2.7	12.4	6.5	14.9
		120/240			3.1	13.0	7.4	17.2
*H05021 <i>*Export only</i>	1x4.0 KW	220/240	1	2+G	3.5/4.1	15.8/17.2	7.4	17.2
Water Inlet (Inch)		Water Pressure		Flow Rate				
3/8 Male Flare		20-75 psig		1.5 gpm				

OPTIONS

Z022 Double Sided Service
Z056 Three Phase Electrical
Z057 Aerator Faucet

ACCESSORIES

A015 Round Drip Tray
A039 In Line Water Filter with Cartridge
A075 Replacement Water Filter Cartridge

HWB SERIES *Hot Water Dispenser*



HWB-10 10 Gallon Hot Water Dispenser

Rugged, all stainless steel construction can handle daily use of high demand hot water dispensing.

Boiler Dimensions/Empty Weight
W16-1/8 D23-5/8 H29-5/8 --64lbs

Shipment Dimensions/Weight
W21 D25 H32 --72lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Gallons / Per Hour	
							Cold	Hot Water
H10011	2x3.0 KW	120/208	1	3+G	4.6	22.1	11.2	25.8
		120/220			5.3	24.2	12.9	29.9
		120/240			6.1	25.5	14.9	34.3
*H10021 *Export only	2X3.0 KW	220/240	1	2+G	5.1/6.1	23.4/25.5	14.9	34.3
Water Inlet (Inch) 3/8 Male Flare		Water Pressure 20-75 psig		Flow Rate 1.5 gpm				



HWB-15 15 Gallon Hot Water Dispenser

Fully automatic hot water dispenser has controlled refill so there's no recovery time.

Boiler Dimensions/Empty Weight
W20-1/8 D27-3/4 H28-3/4 --86lbs

Shipment Dimensions/Weight
W22 D30 H32 --96lbs

Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Gallons / Per Hour	
							Cold	Hot Water
H15011	2x3.0 KW	120/208	1	3+G	4.6	22.1	11.2	25.8
		120/220			5.3	24.2	12.9	29.9
		120/240			6.1	25.5	14.9	34.4
H15021 ⁽¹⁾	3X3.0 KW	120/208	3	4+G	6.9	19.2	16.7	38.6
		120/220			7.9	21.0	19.4	44.8
		120/240			9.1	22.2	22.3	51.5
*H15041 ⁽¹⁾ *Export only	3X3.0 KW	240/415	3	4+G	9.1	12.7	22.3	51.5
Water Inlet (Inch) 3/8 Male Flare		Water Pressure 20-75 psig		Flow Rate 1.5 gpm				

(1) Requires 3 Phase Upcharge (Z056)

HWB-25 25 Gallon Hot Water Dispenser

Perfect for high volume hot water dispensing.

Boiler Dimensions/Empty Weight
W28-1/8 D27-3/4 H29-3/4 --190lbs

Shipment Dimensions/Weight
W38 D28 H38 --210lbs



Electrical Configuration Code	Heater Configuration	Voltage	Phase	Wires	Kilowatt	Max Amp Draw	Gallons / Per Hour	
							Cold	Hot Water
H25011 ⁽²⁾	6x3.0 KW	120/208	3	4+G	13.6	38.0	33.5	77.3
		120/220			15.8	41.6	38.8	89.6
		120/240			18.1	43.8	44.6	103.0
H25021 ⁽¹⁾⁽²⁾	6x4.0 KW	120/208	3	4+G	18.1	50.5	44.6	103.0
		120/220			21.0	55.3	51.8	119.5
		120/240			24.1	58.2	59.5	137.4
*H25061 ⁽²⁾ *Export only	6X3.0 KW	240/415	3	4+G	18.1	25.2	59.5	137.4
Water Inlet (Inch) 3/8 Male Flare		Water Pressure 20-75 psig		Flow Rate 1.5 gpm				

(1) Special Enter

(2) Requires 3 Phase Upcharge (Z056)



LUXUS® Thermal Dispensers & Stands

Use single, double or triple stands to customize to your dispensing needs. Stainless steel is not only durable, but stylish as well. Perfect for both hot and cold beverage dispensing. For use with FETCO® stand single stand S3S-15-1, double stand S3S-15-2 and triple stand S3S-15-3.

LUXUS® L3D Thermal Dispensers

L3D-05 .5 Gallon Dispenser

Item/Capacity
D058 / .5 Gallon

Ship Dimensions/Weight
W15 D11 H22 --8lbs



Use this half gallon dispenser with the new EXTRACTOR® Brewer CBS-2021eG.

L3D-10 1 Gallon Dispenser

Item/Capacity
D048/1.0 Gallon

Ship Dimensions/Weight
W16 D13 H23 --12lbs



Our stylish 1.0 gallon LUXUS® Thermal Dispenser L3D-10 features unsurpassed thermal holding plus a guarded faucet that eliminates cross-contamination which is removable without tools for quick and easy clean up.

L3D-15 1.5 Gallon Dispenser

Item/Capacity
D049/1.5 Gallon

Ship Dimensions/Weight
W17 D13 H25 --15lbs



Our portable 1.5 gallon LUXUS® Thermal Dispenser L3D-1.5 has a built-in drip tray to provide a clean, attractive self-service beverage station that keeps coffee hot for hours without the need for a heat source. Tray is removable for easy clean-up and sanitizing.

L3D-20 2 Gallon Dispenser

Item/Capacity
D050/2.0 Gallon

Ship Dimensions/Weight
W17 D13 H27 --18lbs



The 2.0 gallon LUXUS® Thermal Dispenser L3D-20 is specially designed to put your branding message front and center. Customize the look of your beverage station with vinyl wraps featuring your artwork and logo.

LUXUS® L3S Thermal Dispensers

L3S-05 .5 Gallon Dispenser

Item/Capacity
D059 / .5 Gallon

Ship Dimensions/Weight
W16 D12 H15 --9lbs



Our new half gallon dispenser features an easy-to-read FRESHNESS TIMER® that shows how long the beverage has been holding and a Volume Indicator™ that displays how much beverage is in the dispenser. Faucet guard prevents cross-contamination.

L3S-10 1 Gallon Dispenser

Item/Capacity
D051 / 1.0 Gallon

Ship Dimensions/Weight
W16 D12 H15 --9lbs



Versatile, portable 1.0 gallon LUXUS® Thermal Dispenser L3S-10 can be put together modularly to fit your specific dispensing needs.

L3S-15 1.5 Gallon Dispenser

Item/Capacity
D052 / 1.5 Gallon

Ship Dimensions/Weight
W17 D13 H16 --12lbs



Built-in one-piece carrying handle assures safe and easy transport. Volume Indicator™ and Freshness Timer® feature at-a-glance indicators that let you know how much beverage is in the dispenser and the holding time.

L3S-20 2 Gallon Dispenser

Item/Capacity
D053 / 2.0 Gallon

Ship Dimensions/Weight
W13 D10 H21 --15lbs



Our LUXUS® Thermal Dispenser L3S-20 holds 2.0 gallons of beverage for when you have a high demand for hot, fresh coffee or tea.

LUXUS® L3S Stands



S3S-05-1

Item/Description
A134 / Single Serving Station



S3S-10-1

Item/Description
A093 / Single Serving Station



S3S-10-2

Item/Description
A094 / Double Serving Station



S3S-10-3

Item/Description
A096 / Triple Serving Station

ACCESSORIES

A097 Single Serving Station for L3S-15 & L3S-20 (S3S-15/20-1)
A098 Twin Serving Station for L3S-15 & L3S-20 (S3S-15/20-2)

A099 Triple Serving Station for L3S-15 & L3S-20 (S3S-15/20-3)



LUXUS® Thermal Dispensers

At FETCO®, we had the vision to dispense coffee that always taste just brewed. With the introduction of the LUXUS® Thermal Dispenser, our passion redefined freshness in serving. Today, we continue to be driven by research and development to provide innovative equipment that allows you to serve the freshest coffee and tea every time.

LUXUS® LD Thermal Dispensers

LD-10

1.0 Gallon Dispenser

Item/Capacity
D008/1.0 Gallon

Shipment Dimensions/Weight
W10 D13 H21 --9bs



Built-in handle for easy and quick transportation.

LD-15

1.5 Gallon Dispenser

Item/Capacity
D010/1.5 Gallon

Shipment Dimensions/Weight
W10 D13 H24 --10lbs



This 1.5 gallon Luxus® Thermal Dispenser LD features a handy sight-glass so you always know how much beverage is in the dispenser.

LD-20

2.0 Gallon Dispenser

Item/Capacity
D011/2.0 Gallon

Shipment Dimensions/Weight
W10 D13 H27 --11lbs



High volume beverage dispensing specifically designed to be easy to clean.

LUXUS® LS Thermal Dispensers

LS-10

1.0 Gallon Dispenser

Item/Capacity
D013 / 1.0 Gallon

Shipment Dimensions/Weight
W10 D13 H21 --8lbs



Lock-n-Grip handle provides stable support for safe carrying.

LS-15

1.5 Gallon Dispenser

Item/Capacity
D014 / 1.5 Gallon

Shipment Dimensions/Weight
W10 D13 H21 --9lbs



Use single, double or triple stands to customize to your dispensing needs. Stainless steel is not only durable, but stylish as well. Perfect for both hot and cold beverage dispensing.

LS-20

2.0 Gallon Dispenser

Item/Capacity
D015 / 2.0 Gallon

Shipment Dimensions/Weight
W10 D13 H21 --10lbs



Use single, double or triple stands to customize to your dispensing needs.

LUXUS® TPD Thermal Dispensers

TPD-15

1.5 Gallon Dispenser

Item/Capacity
D009 / 1.5 Gallon

Shipment Dimensions/Weight
W10 D14 H26 --15lbs



This 1.5 gallon dispenser has a clear-view beverage gauge that allows you to see the amount of beverage in the container instantly.

TPD-30

3.0 Gallon Dispenser

Item/Capacity
D012 / 3.0 Gallon

Shipment Dimensions/Weight
W16 D14 H28 --21lbs



The LUXUS® TPD-30 3.0 gallon dispensers provide hot and cold beverage dispensing in volume. Once filled and capped, the stainless steel, fully thermo-insulated LUXUS® TPD-30 is specially designed to maintain the perfect serving temperature for hours.

LBD DISPENSERS



LBD-6 6.0 Gallon Dispenser

Hot, fresh brewed coffee and tea with versatility and performance. This 6 gallon dispenser keep beverages at optimal serving temperature. For use with FETCO® CBS-71A and CBS-72A.

Item/Capacity
D019 / 6.0 Gallon

Shipment Dimensions/Weight
W24 D23 H26 --40lbs

*Shown with A018 serving station
STATION SOLD SEPARATELY*



LBD-6C 6.0 Gallon Dispenser

Hot, fresh brewed coffee and tea with versatility and performance. This 6 gallon dispenser keep beverages at optimal serving temperature. For use with FETCO® CBS-71AC, CBS-72AC, and TBS-71AC.

Item/Capacity
D020 / 6.0 Gallon Mobile

Shipment Dimensions/Weight
W42 D48 H60 --210lbs



LBD-18 18.0 Gallon Dispenser

For high volume serving for hot or cold beverages. Side roller bumpers that allow for easy maneuvering through doorways. For use with FETCO® CBS-72AC.

Item/Capacity
D021 / 18.0 Gallon Mobile

Shipment Dimensions/Weight
W48 D42 H60 --320lbs



LBD-18 18.0 Gallon Tea Dispenser

For high volume serving of Iced Tea. Side roller bumpers that allow for easy maneuvering through doorways. For use with FETCO® TBS-71AC.

Item/Capacity
D028 / 18.0 Gallon Mobile Iced Tea

Shipment Dimensions/Weight
W48 D42 H60 --320lbs



LBD-24 24.0 Gallon Dispenser

Full access lids with positive lock slides and quick turn handles assure positive cover placement after cleaning. For use with FETCO® CBS-72AC.

Item/ Capacity
D022 / 24.0 Gallon Mobile

Shipment Dimensions/Weight
W48 D42 H60 --301lbs

DISPENSERS & SERVERS



Shown with Adapter A074

1.9L Bowl Stainless Steel Lined Server

Item/Capacity
D055/1.9 Liter

Shipment Dimensions/Weight
W12 D10 H8 --3lbs



1.9L Tall Stainless Steel Lined Server

Item/Capacity
D037/1.9 Liter

Shipment Dimensions/Weight
W14 D8 H6 --3lbs



3.0L Stainless Steel Lined Lever Airpot

Item/Capacity
D041/3.0 Liter

Shipment Dimensions/Weight
W18 D10 H8 --6lbs



Round Drip Tray

Item
A015/ Round Drip Tray



ITD-30 Iced Tea Dispenser 3.0 Gallon Dispenser

Item/Capacity
D031/3.0 Gallon
Shipment Dimensions/Weight
W15 D13 H24 --13lbs




ITD-30 Iced Coffee Dispenser 3.0 Gallon Dispenser

Item/Capacity
D031/3.0 Gallon
Shipment Dimensions/Weight
W15 D13 H24 --13lbs



3.0L Airpot Hot Tea Infuser

Item/Capacity
A112/3.0 Liter
Shipment Dimensions/Weight
W6D6 H12 --2lbs



1.0/1.5 Gallon Hot Tea Infuser

Item/Capacity
A113/1.0 Gallon
Shipment Dimensions/Weight
W15 D13 H24 --2lbs

FILTERS & FILTER GUIDE *Water & Paper Filters*

PAPER FILTER GUIDE

EXTRACTOR® Coffee Brewing Systems

CBS-2018	F007
CBS-2021eP	F003
CBS-2021eG	F007
CBS-2031e / CBS-2032e	F002
CBS-2041e / CBS-2042e	F002
CBS-2051e / CBS-2052e	F001
CBS-2052e20	F001

EXTRACTOR® Iced Tea & Iced Coffee Brewing Systems

TBS-21A	F001
---------------	------

5000 Series Brewing Systems

CBS-51H-10	F002
CBS-51H-15 / CBS-52H-15 (Standard)	F001
CBS-51H-15 / CBS-52H-15 (Half Batch-A006)	F002
CBS-51H-15 / CBS-52H-15 (Iced Tea- A082)	F002
CBS-52H-20 (Standard)	F001
CBS-52H-20 (Half Batch-A006)	F002
CBS-52H-20 (Iced Tea - A082)	F002

6000 Series Brewing Systems


CBS-61H / CBS-62H (Standard)	F004
CBS-61H / CBS-62H (Half Batch - A016)	F005

High Volume 7000 Series Brewing System

All Models	F006
------------------	------

3000 Series Airpot Brewing Systems

All Models - Plastic Basket (Standard)	F003
All Models - Stainless Basket (A007)	F002
All Models - Stainless Basket (A085)	F007
All Models - Iced Tea Basket (A083)	F007
All Models - Iced Tea Basket (A084)	F002

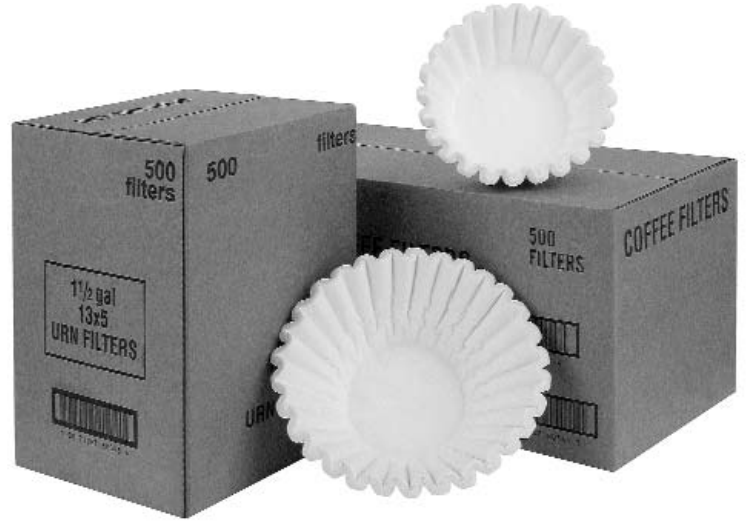

ITEM	SPECIFICATION	COUNT	WEIGHT	SHIP DIMENSIONS
F001	15" x 5 1/2"	500	8 lbs	W9 D9 H19
F002	13" x 5"	500	5 lbs	W9 D9 H13
F003	9 3/4" x 4 1/2"	1000	5 lbs	W14 D8 H10
F004	20" x 8"	500	12 lbs	W14 D14 H20
F005	18" x 7"	500	12 lbs	W14 D14 H18
F006	23" x 9"	500	18 lbs	W14 D14 H20
F007	11 1/4" x 3 3/4"	500	4 lbs	W8 D14 H9

WATER FILTERS

- A039 In-Line Water Filter with Cartridge
- A075 Replacement Water Filter Cartridge

WATER FILTER RATING

Working Pressure	10-125 psi
Temperature	35-100°F
Flow Rate	1.5 gpm
Capacity	30,000
NSF / ANSI 42	
Aesthetic Effects	
Chemical Reduction	
Taste & Odor	
Chlorine Taste & Odor	



DISPENSERS, OPTIONS, FILTERS & ACCESSORIES

DISPENSERS

D008	1.0 Gallon LUXUS® Thermal Dispenser (LD-10)
D009	1.5 Gallon LUXUS® Thermal Dispenser (TPD-15)
D010	1.5 Gallon LUXUS® Thermal Dispenser (LD-15)
D011	2.0 Gallon LUXUS® Thermal Dispenser (LD-20)
D012	3.0 Gallon LUXUS® Thermal Dispenser (TPD-30)
D013	1.0 Gallon LUXUS® Thermal Dispenser (LS-10)
D014	1.5 Gallon LUXUS® Thermal Dispenser (LS-15)
D015	2.0 Gallon LUXUS® Thermal Dispenser (LS-20)
D019	6.0 Gallon LUXUS® Thermal Dispenser (LBD-6)
D020	6.0 Gallon Mobile LUXUS® Thermal Dispenser (LBD-6C)
D021	18.0 Gallon Mobile LUXUS® Thermal Dispenser (LBD-18)
D022	24.0 Gallon Mobile LUXUS® Thermal Dispenser (LBD-24)
D028	18.0 Gallon Iced Tea Mobile LUXUS® Thermal Dispenser (LBD-18)
D031	3.0 Gallon Iced Tea Dispenser (ITD-30)
D031	3.0 Gallon Iced Coffee Dispenser (ITD-30)
D037	1.9 Liter Stainless Steel Lined Server
D041	3.0 Liter Stainless Steel Lined Lever Airpot
D048	1.0 Gallon LUXUS® Thermal Dispenser (L3D-10)
D049	1.5 Gallon LUXUS® Thermal Dispenser (L3D-15)
D050	2.0 Gallon LUXUS® Thermal Dispenser (L3D-20)
D051	1.0 Gallon LUXUS® Thermal Dispenser (L3S-10)
D052	1.5 Gallon LUXUS® Thermal Dispenser (L3S-15)
D053	2.0 Gallon LUXUS® Thermal Dispenser (L3S-20)
D055	1.9 Liter Stainless Steel Bowl Server
D058	0.5 Gallon LUXUS® Thermal Dispenser (L3D-05)
D059	0.5 Gallon LUXUS® Thermal Dispenser (L3S-05)

OPTIONS

Z005	Color Coded Dispenser Faucet Orange, Red, Blue, Green (Standard Black)
Z006	CBS-51H-15 Maritime Package for TPD-15 Only (Includes 2 x A029, Flanged Legs & Dispense Tube Funnel)
Z007	CBS-52H-15 Maritime Package for TPD-15 Only (Includes 4 x A029, Flanged Legs & Dispense Tube Funnel)
Z013	Iced Tea Brew Package (Per Side) (LUXUS® 1.5G Dispenser, Brew Basket & Controls)
Z014	CBS-61H Maritime Package for TPD-30 Only (Includes 2 x A031, Flanged Legs & Dispense Tube Funnel)
Z017	CBS-62H Maritime Package for TPD-30 Only (Includes 4 x A031, Flanged Legs & Dispense Tube Funnel)
Z022	Double Sided Service
Z026	Two Portion Option Single
Z027	Iced Tea Brew Package (LD-10 Dispenser, Brew Basket & Controls)
Z028	Iced Tea Brew Package (Dispenser, Brew Basket & Controls)(Per Side)
Z031	Two Portion Timer Option Dual
Z040	Step Down Transformer
Z042	Universal Wiring, makes a CBS-52H15 multiphase(single & three phase)
Z043	CBS-61H or CBS-62H Universal Wiring (Field Convertible from 1 to 3 Phase)
Z044	Wrap Application for TPD
Z047	Red Handle On Brew Basket
Z048	Green Handle On Brew Basket
Z049	Orange Handle On Brew Basket
Z053	Reverse Display
Z054 ⁽¹⁾	Conversion for Coffee or Hot Tea (3.0 Liter)
Z055	Export Voltages Available
Z056	Three Phase Electrical
Z057	Aerator Faucet
Z058	Water Sensitivity Set For Reverse Osmosis (100K Ohm)
Z063	2032S Basket Lock & Bypass Upgrade
Z064	2031S Basket Lock & Bypass Upgrade
Z067	Wrap Application for L3D & L3S

(1)Takes Place of Second Batch includes Controls & Brew Stand for Airpot

FILTERS

F001	15" x 5 1/2" Paper Filters (500 Per Case)
F002	13" x 5" Paper Filters (500 Per Case)
F003	9 3/4 x 4 1/2 Filter (1000 Per Case)
F004	20" x 8" Paper Filters (500 Per Case)
F005	18" x 7" Paper Filters (500 Per Case)
F006	23" x 9" Paper Filters (500 Per Case)
F007	11 1/4" x 3 3/4" Paper Filters (500 Per Case)

ACCESSORIES

A006	Half Batch Brew Basket (13" x 5")
A009	Brewing Stand for LS-10 (BS-1)
A010	Airpot Brewing Stand 9" (BS-2)
A011	Single Serving Station for LS (SS-1)
A012	Twin Serving Station for LS (SS-2)
A013	Triple Serving Station for LS (SS-3)
A015	Round Drip Tray
A016	Half Batch Brew Basket (18" x 7")
A018	Serving Station for LBD-6 with Drip Tray
A019	Counter for CBS-71A (CTR-71)
A020	Counter for CBS-72A (CTR-72)
A029	TPD-15 Maritime Brewer & Server Ring (MSR-15)
A031	TPD-30 Maritime Brewer & Server Ring (MSR-30)
A034	2 Station Airpot Rack with Drip Tray
A035	3 Station Airpot Rack with Drip Tray
A036	5 Station Airpot Rack with Drip Tray
A037	Gravity Jug Fill Hose for LBD-6C & LBD-18
A039	In Line Water Filter with Cartridge
A066	5 Pound Removable Hopper with Lid
A069	Identifier Plates, Acrylic
A074	Adapter Ring
A075	Replacement Water Filter Cartridge
A078	Gravity Jug Fill Hose for LBD-24
A082	Iced Tea Brew Basket (13" x 5")
A086	Ring Plastic Base for TPD-30
A088	16" x 6" Brew Basket Scoop
A093	Single Serving Station for L3S-10 (S3S-10-1)
A094	Twin Serving Station for L3S-10 (S3S-10-2)
A095	Airpot Brewing Stand (BS-5)
A096	Triple Serving Station for L3S-10 (S3S-10-3)
A097	Single Serving Station for L3S-15 & L3S-20 (S3S-15/20-1)
A098	Twin Serving Station for L3S-15 & L3S-20 (S3S-15/20-2)
A099	Triple Serving Station for L3S-15 & L3S-20 (S3S-15/20-3)
A103	Square Brew Basket
A104	Iced Tea Brew Basket (16" x 6")
A108	Coffee Brew Basket (16" x 6")
A112	Airpot Hot Tea Infuser
A113	1.0/1.5 Gallon Hot Tea Infuser
A118	Hopper Shelf
A120	Quad Serving Station for L3S-10 (S3S-10-4)
A129	Quad Serving Station for L3S-15 & L3S-20 (S3S-15/20-4)
A134	L3S-05 Single Serving Station
99032	1.9 Liter Bowl Orange Lid for Use on D055
71087	3.0 Liter Orange Lid for Use on D041
99022	1.9 Liter Orange Lid for Use on D037

WRAPS

017	Plain Black (TPD-15)
049	Plain Black (L3D-15 & L3S-15)
058	Breaking Fresh Grounds™ for L3D-10 & L3S-10
059	Breaking Fresh Grounds™ for L3D-15 & L3S-15
060	Steeping Fresh Leaves™ for L3D-10 & L3S-10
061	Steeping Fresh Leaves™ for L3D-15 & L3S-15
065	Icing Fresh Coffee™ for L3D-10 & L3S-10
066	Icing Fresh Coffee™ for L3D-15 & L3S-15
067	Icing Fresh Leaves™ for ITD-30
082	Plain Black (L3D-20)

FETCO®

Commercial Equipment Warranty

Warranty for manufactured equipment purchased for installation in the U.S. and Canada is as follows:

- Circuit Boards – 3 years parts and 1 year labor
- Electro mechanical parts -- 2 years parts and 1 year labor
- All other parts -- 1 year parts and 1 year labor
- Accessories and Dispensers: 1 year parts only (airpot vacuum insulation – 1 year)
- Dispenser Funnels – 1 year

Warranty does not apply under the following conditions:

- Accident, neglect or abuse
- Improper installation. Equipment must be installed by a professional technician and must comply with all local electrical, mechanical and plumbing codes
- Relocation or reinstallation
- Any modification to equipment
- Failure to provide neutral to the electrical connection if the unit requires it
- Incorrect voltage applied to the unit at anytime
- Improper cleaning procedures
- Water conditions, including, but not limited to, excessive lime and chlorine
- Faucet seat cups, sight gauge tubes, and sight gauge washers are not covered
- All warranties are null and void if muriatic or any other form of hydrochloric acid is used for cleaning or deliming

Warranty covers all electrical parts, fittings and tubing, but does not cover installation, adjustments, training, preventative maintenance, cleaning, or improper operation/application.

Warranty is effective and conditional on the following:

- FETCO® has received timely notification of the claim by phone: 1.800.338.2699, by email: techsupport@FETCO.com or mail: FETCO®, 600 Rose Road, Lake Zurich, IL 60047
Attention: Director of Technical Support and;
- The item has been verified as under warranty and;
- A Return Authorization Number (RA) has been issued by FETCO® and;
- Pre-paid shipment of defective equipment to FETCO®
- All defective parts must be replaced with genuine FETCO® parts.

The warranty period begins from the day of shipment from FETCO® and warrants that the equipment manufactured by FETCO® will be free from defect in material and craftsmanship existing at the time of manufacturing and appearing within the applicable warranty period.

The warranty does not apply to any equipment, component or part not manufactured by FETCO®. The warranty also does not apply to any equipment, components or parts manufactured by FETCO®, in FETCO's judgment, that has been affected by intentional or unintentional misuse, abuse, alteration, damage, casualty, improper installation or operation, improper maintenance, improper repair or extreme conditions.

The Buyer's resolution against FETCO® for the breach of any obligation resulting from the sale of equipment manufactured by FETCO® whether derived from warranty or otherwise shall be limited, at FETCO's sole discretion, as specified herein to repair, replace or refund. In no circumstances shall FETCO® be liable for any other damages or loss, including, but not limited to, the following:

- Lost profits
- Lost sales
- Loss of use of equipment
- Expenses for removal or reinstallation
- Claims from the Buyer's customers
- Cost of capitol
- Cost of downtime
- Cost of substitute equipment
- Facilities or services or any other special, incidental or consequential damages

Warranty service:

Service calls are limited to normal weekday business hours (no weekends or holidays). No more than 2 hours of travel time will be covered per round trip. Reconditioned circuit boards may be used for warranty replacements. Warranty is null and void if repairs are not made by a FETCO® recommended service agent. If the defective parts are not returned or if the parts are found by factory testing to be operational and functional, the warranty claim will be denied.

T E R M S O F S A L E

THIS PRICE LIST SUPERSEDES ALL PREVIOUS ISSUES. ALL ORDERS SUBJECT TO APPROVAL AT THE CORPORATE OFFICE OF FETCO® IN LAKE ZURICH, ILLINOIS.

Terms and conditions prevailing at time of shipment.

TERMS : Net 30 days from date of invoice. All shipments are FOB FETCO® factory. Minimum billing \$40. When ordering please specify model number and type of electrical needed. For custom orders consult FETCO® Sales Department. No returns will be accepted without prior authorization and return authorization number from Customer or Technical Service Departments. Returns must be shipped freight prepaid unless otherwise confirmed by FETCO®. If merchandise is lost or damaged in transit, purchaser must initiate a claim directly with carrier. Claims for shortages must be made within 10 days from receipt of goods. Claims on damaged goods should be made immediately. If your inspection shows damage, call your local representative of the freight carrier at once without further unpacking. File a report of concealed damage and file your claim with the carrier. The responsibility of carrier claims for damages remains with the purchaser. FETCO® reserves the right to discontinue any model at any time, change specifications and/or designs without incurring further obligation.

TERMS AND CONDITIONS TO THE ACKNOWLEDGMENT BY FOOD EQUIPMENT TECHNOLOGIES COMPANY, HEREIN AFTER CALLED FETCO®, OF THE BUYER'S PURCHASE ORDER

1. The Buyer shall pay all taxes applicable to or connected with the transaction.
2. All shipping instructions must be in writing. FETCO® reserves the right to select the carrier. Any excess transportation charges incurred by the Buyer's selection of the carrier must be borne by the Buyer. All sales by FETCO® to the Buyer shall be F.O.B. FETCO® plant in Lake Zurich, Illinois 60047. FETCO® shall invoice the Buyer, which shall pay FETCO® for each shipment on Net 30 day terms.
3. Title and risk pass to the Buyer when a shipment leaves the plant of FETCO®.
4. FETCO® shall not be liable for failure of performance due to labor difficulties, fires, floods, unavailability of materials, compliance with laws or governmental regulations, wars, or other casualties or causes beyond its control.
5. THERE ARE NO EXPRESS OR IMPLIED WARRANTIES, INCLUDING WARRANTIES AS TO MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Claims for shortages, damaged merchandise, or merchandise defective as to materials or workmanship shall be limited to a right of the Buyer to the replacement thereof, or, at the option of FETCO®, to a credit for the purchase price of the affected merchandise, excluding hereby any claim for incidental or consequential damage of any kind. Any claim shall be deemed waived if the Buyer fails:
 - a. to give written notice thereof to FETCO® within ten (10) days after delivery
 - b. to set aside said merchandise for examination by the carrier or FETCO®;
 - c. to cause the carrier to note an exception covering the alleged shortage or damage to merchandise at the time the delivery is accepted from the carrier; or
 - d. to make or give such demand, claim or notice to the carrier with respect to such shortages or damage as the Bill of Lading may require
6. The Buyer must first obtain written permission and shipping instructions from FETCO® before returning merchandise; otherwise, returned merchandise will be refused upon arrival and FETCO® will assume no responsibility therefor. Approved returns of merchandise found to be defective (subject to inspection by FETCO®), or merchandise shipped by FETCO® in error, will be accepted for full credit and FETCO® will also pay return freight charges. All approved returns must be received within 30 days of the return authorization date. All returns beyond 30 days will be refused and returned to company returning the product.
7. In the event that the Buyer breaches the contract formed by Buyer's Purchase Order and the Acknowledgment of FETCO®, the Buyer shall be obligated to pay all charges accrued to the date of breach, and, in addition to general damages, all expenses of enforcing the contract including reasonable attorneys fees.
8. Waiver of any breach of the contract shall not operate as a waiver of any future breach nor as a continuing waiver nor shall such waiver or any course of conduct operate as a modification or rescission of any of the terms contained herein.
9. If any provision hereof shall be held to contravene any applicable law, the contract shall be deemed reformed to the extent of conforming to said law and in all other respects the contract shall remain in full force and effect.
10. The contract represents the entire agreement between the parties with respect to the subject matter hereof and cannot be modified except in writing signed by an authorized representative of FETCO® and the Buyer. The rights and obligations of the parties shall be governed and construed according to the laws of the State of Illinois without regard to the choice of laws, rules, and the parties agree and consent to jurisdiction and venue for any dispute in the state or federal courts situated in Chicago, Illinois.

RETURN POLICY: Effective 1/1/09

*All products returned for credit or exchange must have a **Return Authorization Number (RA#)** from our factory in **Lake Zurich, IL (1.800.FETCO.99)**. All returned cartons must be clearly marked with the RA#. All returns must be returned pre-paid and insured. Equipment should be properly packed in original cartons. Equipment damaged in shipment will not be accepted without a Return authorization number from our factory. All returns are subject to a 30% restocking fee. Credit will be issued if product is returned in perfect condition.*